

1U Rack Mount 15"/17"/19" TFT Console With 1/8/16 Ports KVM Switch





EJ-115BRK-01

1U rack mount 15" TFT console

EJ-115BRK-01 is cost efficiency industrial level input solution, easy to install and use. EJ-115BRK-01 provide optimize your space utilization by controlling your system in just 1U rack space.

Single
Rail

15"
TFT LCD


17
various
Keyboard

ROHS
Compliant

Features

- Single rail easy to install and use
- Support 17 various keyboard languages
- Bright Active Matrix TFT display
- OSD function (On Screen Display) for LCD display
- Durable keyboards (touchpad or trackball)
- Panel protected by tempered glass
- Support USB interface (optional)
- Audio function (optional)
- DC power (optional)
- Support DVI (optional)

Dimension

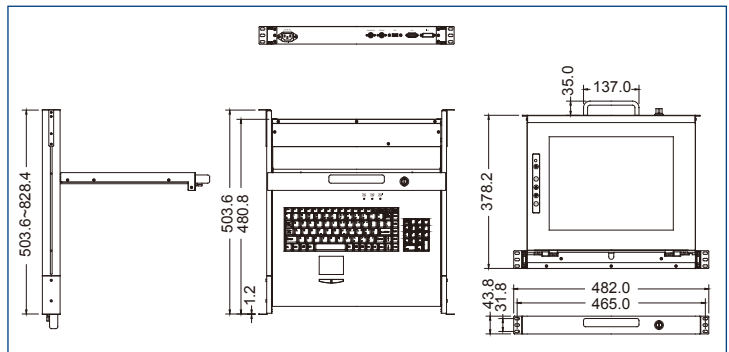

Specification

System Connections	1
Dimension	482 x 447.5 x 44 mm / 19.0 x 17.6 x 1.7 inches
Package Dimension	677 x 564 x 206 mm / 26.7 x 22.2 x 8.1 inches
Net Weight	11.0 Kg / 24.3 lbs
Gross Weight	18.0 Kg / 39.7 lbs
Display Size	15 inches
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1024 x 768 (XGA)
Pixel Pitch	Supports 0.297 mm x 0.297 mm
Viewing Angle (CR>10)	Right-Left view 130° (Typ) Up-Down View 100° (Typ)
Contrast Ratio	400 : 1
Brightness	White 250 cd/m ² (Center 1 point Typ)
Back Light	Dual Lamps for Back Light
Supported Colors	16M Colors (6-bit with FRC)
Response Time	Rising Time 5 ms, Decay Time 11 ms
Operating System	Dos, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2 and USB
Connectors	1 x VGA HDB-15 pin, 2 x PS/2 Mini Din 6 pin, 1 x AC Inlet
System Cables	VGA + PS/2 x 2 cable or VGA + USB x 1 cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45 ~ 80 KHz
Power Source	100 ~ 240 VAC input
Power Consumption	16 W, 10.41 W for Panel
Temperature	Operate 0 ~ 50 °C / 32 ~ 122 °F Storage -20 ~ 60 °C / -4 ~ 140 °F
Humidity	10% ~ 90% RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	US, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japanese, Mandarin, Russian, Hebrew
Certification	CE / FCC, UL / CUL / C-Tick

Options

Color (Black / Beige / OEM color)

Cherry keyboard with trackball (PS/2 only)

Touch screen (USB or RS232)

DC power (-48V ~ +48V and +-12V with additional cost)

USB interface


Rear bracket extension up to 1000mm

Signal cable 1.8m / 3.0m / 5.0m

Audio function

DVI interface

Application

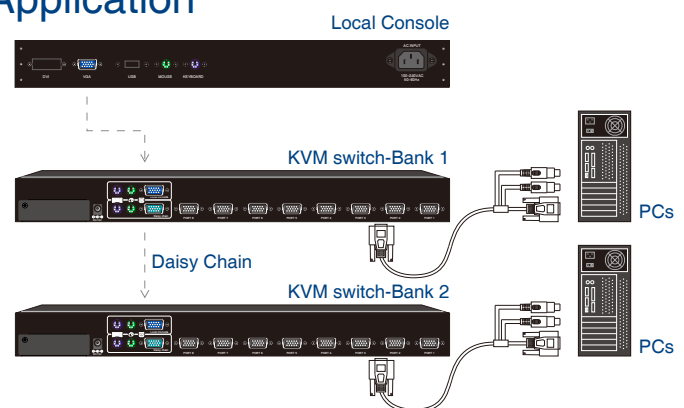



EJ-115BRK-08

1U rack mount 15" TFT console with 8 ports KVM switch

EJ-115BRK-08 is cost efficiency industrial level input solution, easy to install and use. EJ-115BRK-08 provide optimize your space utilization by controlling your system in just 1U rack space. With EJ-115BRK-08, you can control 8 platforms by using built-in KVM switch and easily expand the connections up to 8 levels with the combination of KVM switch boxes.

Single Rail


15" TFT LCD

17 various Keyboard

ROHS Compliant

8 ports KVM switch

Dimension

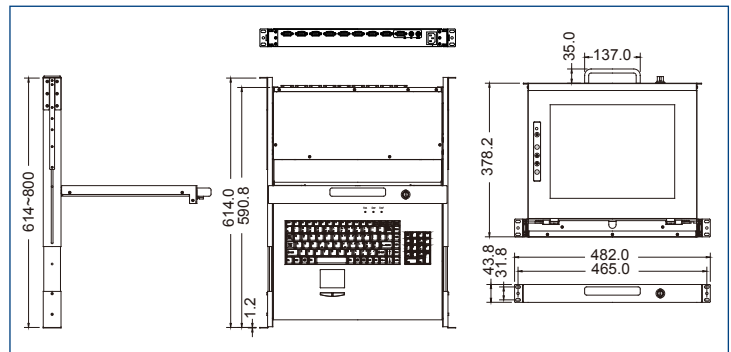

Features

- Single rail easy to install and use
- Support 17 various keyboard languages
- Bright Active Matrix TFT display
- OSD function (On Screen Display) for LCD display
- Durable keyboards (touchpad or trackball)
- Panel protected by tempered glass
- DC power (optional)

Specification

System Connections	8
Dimension	592 x 447.5 x 44 mm / 23.3 x 17.6 x 1.7 inches
Package Dimension	788 x 564 x 206 mm / 31.0 x 22.2 x 8.1 inches
Net Weight	12.0 Kg / 26.5 lbs
Gross Weight	18.5 Kg / 40.8 lbs
Display Size	15 inches
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1024 x 768 (XGA)
Pixel Pitch	Supports 0.297 mm x 0.297 mm
Viewing Angle (CR>10)	Right-Left view 130° (Typ) Up-Down View 100° (Typ)
Contrast Ratio	400 : 1
Brightness	White 250 cd/m ² (Center 1 point Typ)
Back Light	Dual Lamps for Back Light
Supported Colors	16M Colors (6-bit with FRC)
Response Time	Rising Time 5 ms, Decay Time 11 ms
Operating System	Dos, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2 and USB
Connectors	1 x VGA HDDB-15 pin, 2 x PS/2 Mini Din 6 pin, 1 x AC Inlet, 8 x HDDB-15 pin for system connection
System Cables	VGA + PS/2 x 2 cable or VGA + USB x 1 cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45 ~ 80 KHz
Power Source	100 ~ 240 VAC input
Power Consumption	16 W, 10.41 W for Panel
Temperature	Operate 0 ~ 50 °C / 32 ~ 122 °F Storage -20 ~ 60 °C / -4 ~ 140 °F
Humidity	10% ~ 90% RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	US, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japanese, Mandarin, Russian, Hebrew
Certification	CE / FCC, UL / CUL / C-Tick

Options

Color (Black / Beige / OEM color)


Cherry keyboard with trackball (PS/2 only)

DC power (-48V ~ +48V and +12V with additional cost)

Rear bracket extension up to 1000mm

Signal cable 1.8m / 3.0m / 5.0m

Application

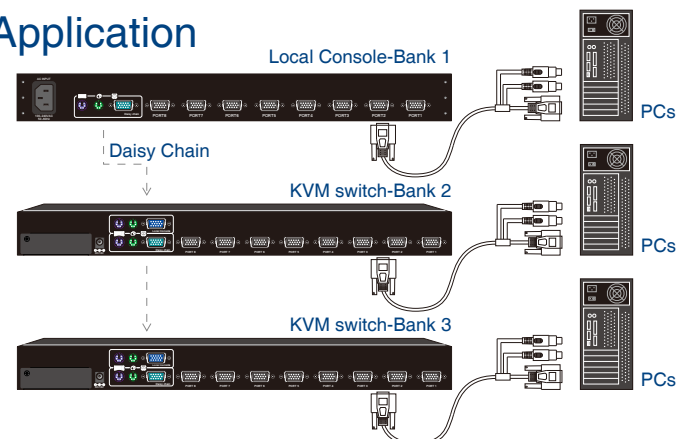




EJ-115BRK-16

1U rack mount 15" TFT console with 16 ports KVM switch

EJ-115BRK-16 is cost efficiency industrial level input solution, easy to install and use. EJ-115BRK-16 provide optimize your space utilization by controlling your system in just 1U rack space. With EJ-115BRK-16, you can control 16 platforms by using built-in KVM switch and easily expand the connections up to 8 levels with the combination of KVM switch boxes.

Single Rail 15" TFT LCD 17 various Keyboard ROHS Compliant 16 ports KVM switch

Dimension

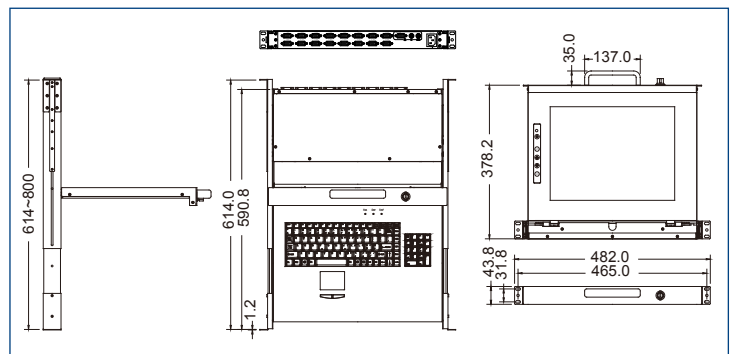

Features

- Single rail easy to install and use
- Support 17 various keyboard languages
- Bright Active Matrix TFT display
- OSD function (On Screen Display) for LCD display
- Durable keyboards (touchpad or trackball)
- Panel protected by tempered glass
- DC power (optional)

Specification

Model Name	EJ-115BRK-16
System Connections	16
Dimension	592 x 447.5 x 44 mm / 23.3 x 17.6 x 1.7 inches
Package Dimension	788 x 564 x 206 mm / 31.0 x 22.2 x 8.1 inches
Net Weight	12.5 Kg / 27.6 lbs
Gross Weight	19.0 Kg / 41.9 lbs
Display Size	15 inches
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1024 x 768 (XGA)
Pixel Pitch	Supports 0.297 mm x 0.297 mm
Viewing Angle (CR>10)	Right-Left view 130° (Typ) Up-Down View 100° (Typ)
Contrast Ratio	400 : 1
Brightness	White 250 cd/m ² (Center 1 point Typ)
Back Light	Dual Lamps for Back Light
Supported Colors	16M Colors (6-bit with FRC)
Response Time	Rising Time 5 ms, Decay Time 11 ms
Operating System	Dos, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2 and USB
Connectors	1 x VGA HDDB-15 pin, 2 x PS/2 Mini Din 6 pin, 1 x AC Inlet, 16 x HDDB-15 pin for system connection
System Cables	VGA + PS/2 x 2 cable or VGA + USB x 1 cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45 ~ 80 KHz
Power Source	100 ~ 240 VAC input
Power Consumption	16 W, 10.41 W for Panel
Temperature	Operate 0 ~ 50 °C / 32 ~ 122 °F Storage -20 ~ 60 °C / -4 ~ 140 °F
Humidity	10% ~ 90% RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	US, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japanese, Mandarin, Russian, Hebrew
Certification	CE / FCC, UL / CUL / C-Tick

Options

Color (Black / Beige / OEM color)


Cherry keyboard with trackball (PS/2 only)

DC power (-48V ~ +48V and +12V with additional cost)

Rear bracket extension up to 1000mm

Signal cable 1.8m / 3.0m / 5.0m

Application

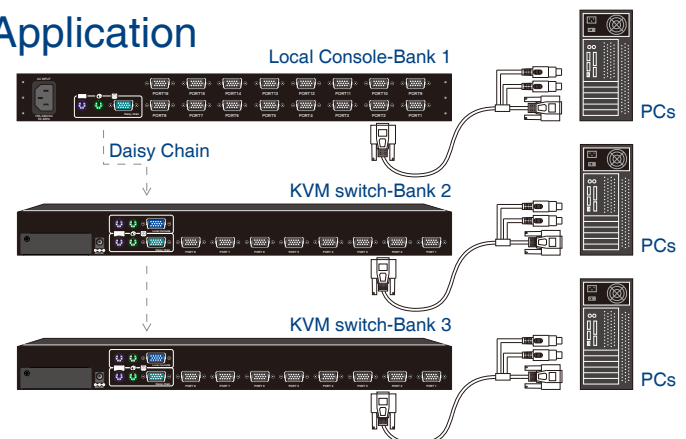



EJ-117BRK-01

1U rack mount 17" TFT console

EJ-117BRK-01 is cost efficiency industrial level input solution, easy to install and use. EJ-117BRK-01 provide optimize your space utilization by controlling your system in just 1U rack space.

Single
Rail

17"
TFT LCD

17
various
Keyboard


ROHS
Compliant

SUN
microsystems

Features

- Single rail easy to install and use
- Support Sun native resolution
- Support 17 various keyboard languages
- Bright Active Matrix TFT display
- OSD function (On Screen Display) for LCD display
- Durable keyboards (touchpad or trackball)
- Panel protected by tempered glass
- Support USB interface (optional)
- Audio function (optional)
- DC power (optional)
- Support DVI (optional)

Dimension

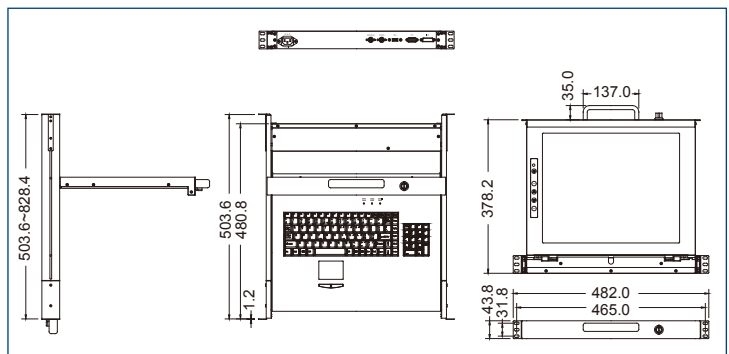

Specification

Model Name	EJ-117BRK-01
System Connections	1
Dimension	482 x 447.5 x 44 mm / 19.0 x 17.6 x 1.7 inches
Package Dimension	677 x 564 x 206 mm / 26.7 x 22.2 x 8.1 inches
Net Weight	12.0 Kg / 26.5 lbs
Gross Weight	18.5 Kg / 40.8 lbs
Display Size	17 inches
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1280 x 1024 (SXGA)
Pixel Pitch	Supports 0.264 mm x 0.264 mm
Viewing Angle (CR>10)	Right-Left view 60° ~ 70° (Typ) Up-Down View 45° ~ 60° (Typ)
Contrast Ratio	450 : 1
Brightness	White 300 cd/m ² (Center 1 point Typ)
Back Light	Four Lamps for Back Light
Supported Colors	16.7M Colors (8-bit with FRC)
Response Time	Rising Time 2 ms, Decay Time 14 ms
Operating System	Dos, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2 and USB
Connectors	1 x VGA HDDB-15 pin, 2 x PS/2 Mini Din 6 pin, 1 x AC Inlet
System Cables	VGA + PS/2 x 2 cable or VGA + USB x 1 cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45 ~ 80 KHz
Power Source	100 ~ 240 VAC input
Power Consumption	25 W, 19.05 W for Panel
Temperature	Operate 0 ~ 50 °C / 32 ~ 122 °F Storage -20 ~ 60 °C / -4 ~ 140 °F
Humidity	10% ~ 90% RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	US, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japanese, Mandarin, Russian, Hebrew
Certification	CE / FCC, UL / CUL / C-Tick

Options

Color (Black / Beige / OEM color)

Cherry keyboard with trackball(PS/2 only)

Touch screen (USB or RS232)

DC power (-48V ~ +48V and +-12V with additional cost)

USB interface

Additional SUN function key


Rear bracket extension up to 1000mm

Signal cable 1.8m / 3.0m / 5.0m

Audio function

DVI interface

Application

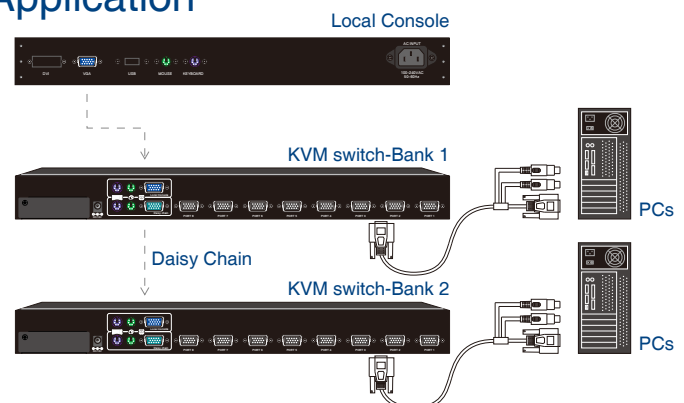



EJ-117BRK-08

1U rack mount 17" TFT console with 8 ports KVM switch

EJ-117BRK-08 is cost efficiency industrial level input solution, easy to install and use. EJ-117BRK-08 provide optimize your space utilization by controlling your system in just 1U rack space. With EJ-117BRK-08, you can control 8 platforms by using built-in KVM switch and easily expand the connections up to 8 levels with the combination of KVM switch boxes.

Single Rail

17" TFT LCD


17 various Keyboard

ROHS Compliant

8 ports KVM switch

SUN microsystems

Dimension

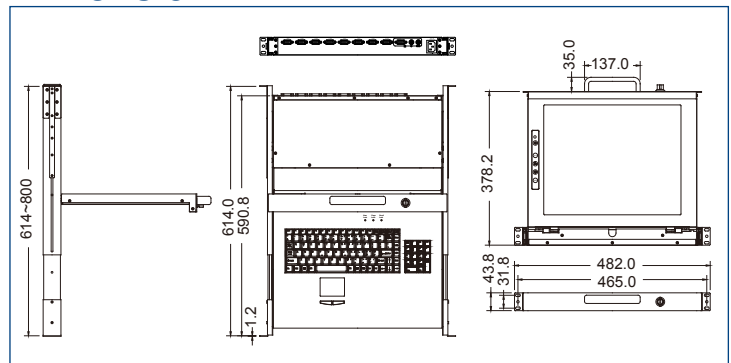

Features

- Single rail easy to install and use
- Support Sun native resolution
- Support 17 various keyboard languages
- Bright Active Matrix TFT display
- OSD function (On Screen Display) for LCD display
- Durable keyboards (touchpad or trackball)
- Panel protected by tempered glass
- DC power (optional)

Specification

Model Name	EJ-117BRK-08
System Connections	8
Dimension	592 x 447.5 x 44 mm / 23.3 x 17.6 x 1.7 inches
Package Dimension	788 x 564 x 206 mm / 31.0 x 22.2 x 8.1 inches
Net Weight	13.0 Kg / 28.7 lbs
Gross Weight	20.5 Kg / 45.2 lbs
Display Size	17 inches
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1280 x 1024 (SXGA)
Pixel Pitch	Supports 0.264 mm x 0.264 mm
Viewing Angle (CR>10)	Right-Left view 60° ~ 70° (Typ) Up-Down View 45° ~ 60° (Typ)
Contrast Ratio	450 : 1
Brightness	White 300 cd/m ² (Center 1 point Typ)
Back Light	Four Lamps for Back Light
Supported Colors	16.7M Colors (8-bit with FRC)
Response Time	Rising Time 2 ms, Decay Time 14 ms
Operating System	Dos, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2 and USB
Connectors	1 x VGA HDDB-15 pin, 2 x PS/2 Mini Din 6 pin, 1 x AC Inlet, 8 x HDDB-15 pin for system connection
System Cables	VGA + PS/2 x 2 cable or VGA + USB x 1 cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45 ~ 80 KHz
Power Source	100 ~ 240 VAC input
Power Consumption	25 W, 19.05 W for Panel
Temperature	Operate 0 ~ 50 °C / 32 ~ 122 °F Storage -20 ~ 60 °C / -4 ~ 140 °F
Humidity	10% ~ 90% RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	US, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japanese, Mandarin, Russian, Hebrew
Certification	CE / FCC, UL / CUL / C-Tick

Options

Color (Black / Beige / OEM color)

Cherry keyboard with trackball(PS/2 only)


DC power (-48V ~ +48V and +12V with additional cost)

Additional SUN function key

Rear bracket extension up to 1000mm

Signal cable 1.8m / 3.0m / 5.0m

Application

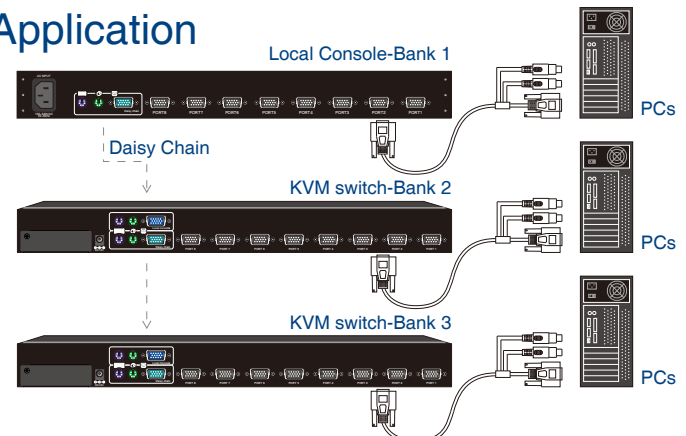



EJ-117BRK-16

1U rack mount 17" TFT console with 16 ports KVM switch

EJ-117BRK-16 is cost efficiency industrial level input solution, easy to install and use. EJ-117BRK-16 provide optimize your space utilization by controlling your system in just 1U rack space. With EJ-117BRK-16, you can control 16 platforms by using built-in KVM switch and easily expand the connections up to 8 levels with the combination of KVM switch boxes.

Single Rail

17" TFT LCD


17 various Keyboard

ROHS Compliant

16 ports KVM switch

SUN microsystems

Dimension

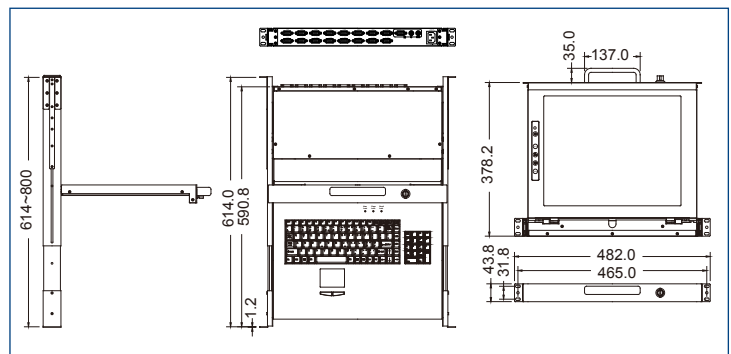

Features

- Single rail easy to install and use
- Support Sun native resolution
- Support 17 various keyboard languages
- Bright Active Matrix TFT display
- OSD function (On Screen Display) for LCD display
- Durable keyboards (touchpad or trackball)
- Panel protected by tempered glass
- DC power (optional)

Specification

Model Name	EJ-117BRK-16
System Connections	16
Dimension	592 x 447.5 x 44 mm / 23.3 x 17.6 x 1.7 inches
Package Dimension	788 x 564 x 206 mm / 31.0 x 22.2 x 8.1 inches
Net Weight	13.5 Kg / 29.8 lbs
Gross Weight	21.0 Kg / 46.3 lbs
Display Size	17 inches
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1280 x 1024 (SXGA)
Pixel Pitch	Supports 0.264 mm x 0.264 mm
Viewing Angle (CR>10)	Right-Left view 60° ~ 70° (Typ) Up-Down View 45° ~ 60° (Typ)
Contrast Ratio	450 : 1
Brightness	White 300 cd/m ² (Center 1 point Typ)
Back Light	Four Lamps for Back Light
Supported Colors	16.7M Colors (8-bit with FRC)
Response Time	Rising Time 2 ms, Decay Time 14 ms
Operating System	Dos, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2 and USB
Connectors	1 x VGA HDDB-15 pin, 2 x PS/2 Mini Din 6 pin, 1 x AC Inlet, 16 x HDDB-15 pin for system connection
System Cables	VGA + PS/2 x 2 cable or VGA + USB x 1 cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45 ~ 80 KHz
Power Source	100 ~ 240 VAC input
Power Consumption	25 W, 19.05 W for Panel
Temperature	Operate 0 ~ 50 °C / 32 ~ 122 °F Storage -20 ~ 60 °C / -4 ~ 140 °F
Humidity	10% ~ 90% RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	US, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japanese, Mandarin, Russian, Hebrew
Certification	CE / FCC, UL / CUL / C-Tick

Options

Color (Black / Beige / OEM color)

Cherry keyboard with trackball(PS/2 only)


DC power (-48V ~ +48V and +12V with additional cost)

Additional SUN function key

Rear bracket extension up to 1000mm

Signal cable 1.8m / 3.0m / 5.0m

Application

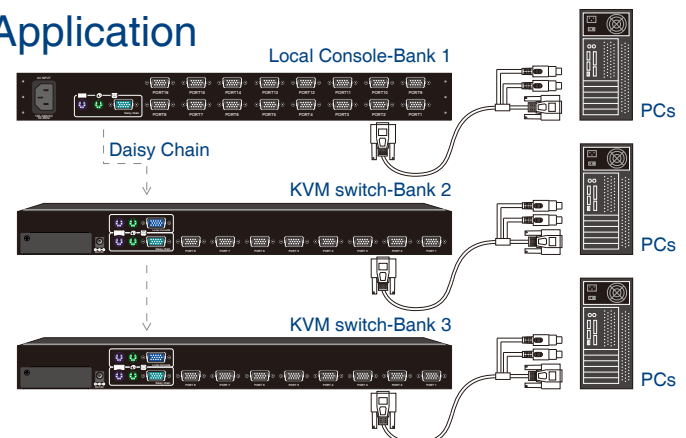



EJ-119BRK-01

1U rack mount 19" TFT console

EJ-119BRK-01 is cost efficiency industrial level input solution, easy to install and use. EJ-119BRK-01 provide optimize your space utilization by controlling your system in just 1U rack space.

Single
Rail


19"
TFT LCD

17
various
Keyboard

ROHS
Compliant

SUN
microsystems

Dimension

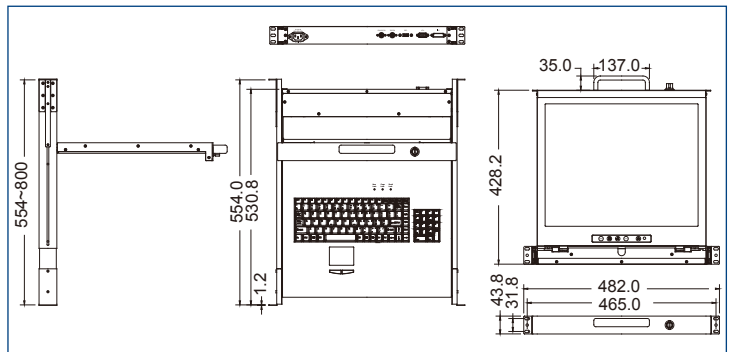

Features

- Single rail easy to install and use
- Support Sun native resolution
- Support 17 various keyboard languages
- Bright Active Matrix TFT display
- OSD function (On Screen Display) for LCD display
- Durable keyboard (touchpad)
- Panel protected by tempered glass
- Support USB interface (optional)
- Audio function (optional)
- DC power (optional)
- Support DVI (optional)

Specification

Model Name	EJ-119BRK-01
System Connections	1
Dimension	532 x 447.5 x 44 mm / 20.9 x 17.6 x 1.7 inches
Package Dimension	715 x 564 x 206 mm / 28.1 x 22.2 x 8.1 inches
Net Weight	12.5 Kg / 27.6 lbs
Gross Weight	19.5 Kg / 43.0 lbs
Display Size	19 inches
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1280 x 1024 (SXGA)
Pixel Pitch	Supports 0.098 mm x 0.294 mm
Viewing Angle (CR>10)	Right-Left view 140° (Typ) Up-Down View 140° (Typ)
Contrast Ratio	500 : 1
Brightness	White 300 cd/m ² (Center 1 point Typ)
Back Light	Four Lamps for Back Light
Supported Colors	16.7M Colors (8-bit with FRC)
Response Time	Rising Time 2 ms, Decay Time 10 ms
Operating System	Dos, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2 and USB
Connectors	1 x VGA HDBB-15 pin, 2 x PS/2 Mini Din 6 pin, 1 x AC Inlet
System Cables	VGA + PS/2 x 2 cable or VGA + USB x 1 cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45 ~ 80 KHz
Power Source	100 ~ 240 VAC input
Power Consumption	25 W, 21.05 W for Panel
Temperature	Operate 0 ~ 50 °C / 32 ~ 122 °F Storage -20 ~ 60 °C / -4 ~ 140 °F
Humidity	10% ~ 90% RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	US, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japanese, Mandarin, Russian, Hebrew
Certification	CE / FCC, UL / CUL / C-Tick

Options

Color (Black / Beige / OEM color)

Touch screen (USB or RS232)

DC power (-48V ~ +48V and +-12V with additional cost)

USB interface

Additional SUN function key


Rear bracket extension up to 1000mm

Signal cable 1.8m / 3.0m / 5.0m

Audio function

DVI interface

Application

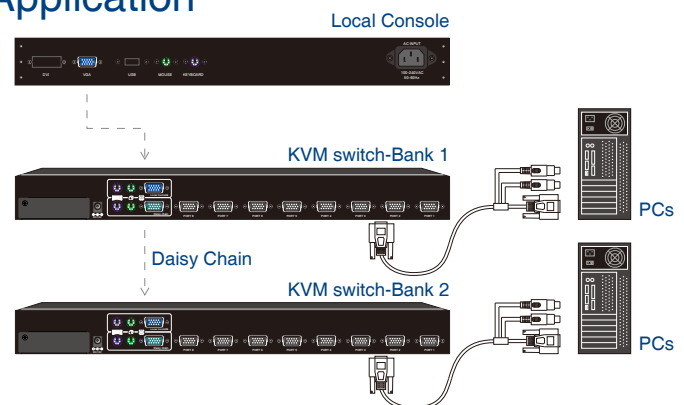

AUSTEL

CE FC




EJ-119BRK-08

1U rack mount 19" TFT console with 8 ports KVM switch

EJ-119BRK-08 is cost efficiency industrial level input solution, easy to install and use. EJ-119BRK-08 provide optimize your space utilization by controlling your system in just 1U rack space. With EJ-119BRK-08, you can control 8 platforms by using built-in KVM switch and easily expand the connections up to 8 levels with the combination of KVM switch boxes.

Single
Rail19"
TFT LCD17
various
KeyboardROHS
Compliant8
ports
KVM switchSUN
microsystems

Dimension

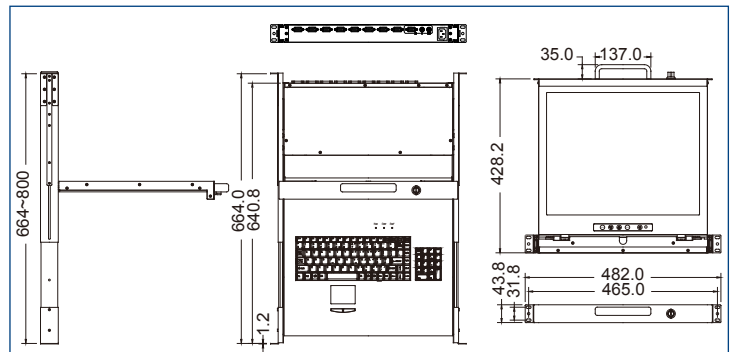

Features

- Single rail easy to install and use
- Support Sun native resolution
- Support 17 various keyboard languages
- Bright Active Matrix TFT display
- OSD function (On Screen Display) for LCD display
- Durable keyboard (touchpad)
- Panel protected by tempered glass
- DC power (optional)

Specification

Model Name	EJ-119BRK-08
System Connections	8
Dimension	642 x 447.5 x 44 mm / 22.4 x 17.6 x 1.7 inches
Package Dimension	827 x 564 x 206 mm / 32.6 x 22.2 x 8.1 inches
Net Weight	14.0 Kg / 30.9 lbs
Gross Weight	21.5 Kg / 47.4 lbs
Display Size	19 inches
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1280 x 1024 (SXGA)
Pixel Pitch	Supports 0.098 mm x 0.294 mm
Viewing Angle (CR>10)	Right-Left view 140° (Typ) Up-Down View 140° (Typ)
Contrast Ratio	500 : 1
Brightness	White 300 cd/m ² (Center 1 point Typ)
Back Light	Four Lamps for Back Light
Supported Colors	16.7M Colors (8-bit with FRC)
Response Time	Rising Time 2 ms, Decay Time 10 ms
Operating System	Dos, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2 and USB
Connectors	1 x VGA HDDB-15 pin, 2 x PS/2 Mini Din 6 pin, 1 x AC Inlet, 8 x HDDB-15 pin for system connection
System Cables	VGA + PS/2 x 2 cable or VGA + USB x 1 cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45 ~ 80 KHz
Power Source	100 ~ 240 VAC input
Power Consumption	25 W, 21.05 W for Panel
Temperature	Operate 0 ~ 50 °C / 32 ~ 122 °F Storage -20 ~ 60 °C / -4 ~ 140 °F
Humidity	10% ~ 90% RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	US, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japanese, Mandarin, Russian, Hebrew
Certification	CE / FCC, UL / CUL / C-Tick

Options

Color (Black / Beige / OEM color)


DC power (-48V ~ +48V and +-12V with additional cost)

Additional SUN function key

Rear bracket extension up to 1000mm

Signal cable 1.8m / 3.0m / 5.0m

Application

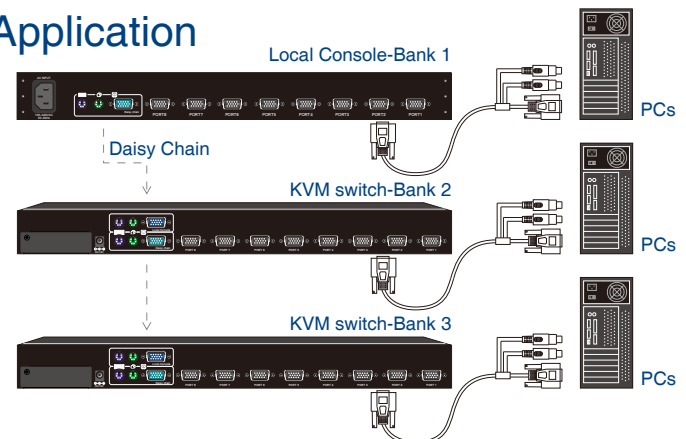



EJ-119BRK-16

1U rack mount 19" TFT console with 16 ports KVM switch

EJ-119BRK-16 is cost efficiency industrial level input solution, easy to install and use. EJ-119BRK-16 provide optimize your space utilization by controlling your system in just 1U rack space. With EJ-119BRK-16, you can control 16 platforms by using built-in KVM switch and easily expand the connections up to 8 levels with the combination of KVM switch boxes.

Single
Rail

19"
TFT LCD


17
various
Keyboard

ROHS
Compliant

16
ports
KVM switch

SUN
microsystems

Dimension

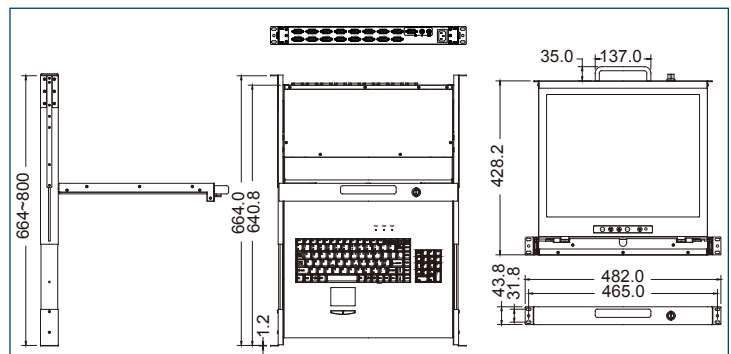

Features

- Single rail easy to install and use
- Support Sun native resolution
- Support 17 various keyboard languages
- Bright Active Matrix TFT display
- OSD function (On Screen Display) for LCD display
- Durable keyboard (touchpad)
- Panel protected by tempered glass
- DC power (optional)

Specification

Model Name	EJ-119BRK-16
System Connections	16
Dimension	642 x 447.5 x 44 mm / 22.4 x 17.6 x 1.7 inches
Package Dimension	827 x 564 x 206 mm / 32.6 x 22.2 x 8.1 inches
Net Weight	14.5 Kg / 32.0 lbs
Gross Weight	22.0 Kg / 48.5 lbs
Display Size	19 inches
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1280 x 1024 (SXGA)
Pixel Pitch	Supports 0.098 mm x 0.294 mm
Viewing Angle (CR>10)	Right-Left view 140° (Typ) Up-Down View 140° (Typ)
Contrast Ratio	500 : 1
Brightness	White 300 cd/m ² (Center 1 point Typ)
Back Light	Four Lamps for Back Light
Supported Colors	16.7M Colors (8-bit with FRC)
Response Time	Rising Time 2 ms, Decay Time 10 ms
Operating System	Dos, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2 and USB
Connectors	1 x VGA HDDB-15 pin, 2 x PS/2 Mini Din 6 pin, 1 x AC Inlet, 16 x HDDB-15 pin for system connection
System Cables	VGA + PS/2 x 2 cable or VGA + USB x 1 cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45 ~ 80 KHz
Power Source	100 ~ 240 VAC input
Power Consumption	25 W, 21.05 W for Panel
Temperature	Operate 0 ~ 50 °C / 32 ~ 122 °F Storage -20 ~ 60 °C / -4 ~ 140 °F
Humidity	10% ~ 90% RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	US, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japanese, Mandarin, Russian, Hebrew
Certification	CE / FCC, UL / CUL / C-Tick

Options

Color (Black / Beige / OEM color)


DC power (-48V ~ +48V and +-12V with additional cost)

Additional SUN function key

Rear bracket extension up to 1000mm

Signal cable 1.8m / 3.0m / 5.0m

Application

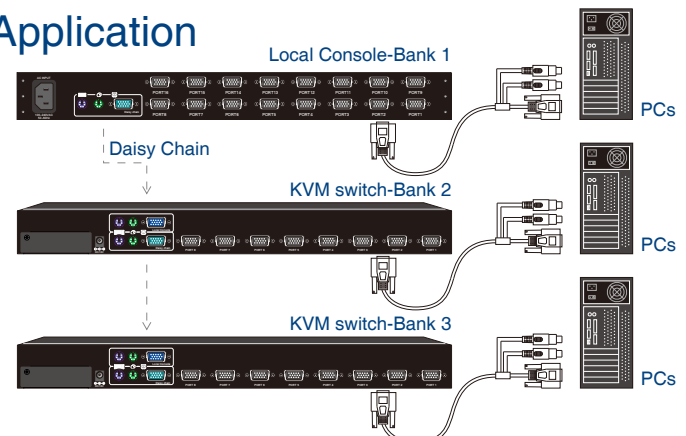

AUSTEL

CE FC

DYNAPOWER USA

Corporate Headquarters

230 Paseo Sonrisa Walnut, California 91789 USA

Telephone Numbers

Sales Division

Toll Free(888)696-DYNA

Toll Free(888)696-3962

Fax Number(909)598-3462

Website: <http://www.dynapowerusa.com>

E-mail: dp_sales@dynapowerusa.com

RMA: dp_rma@dynapowerusa.com

