



# CERTIFICATE

Issued Date: July 05, 2010  
Report No.: 106030R-ITCEP07V04

This is to certify that the following designated product

**Product** : Industrial Power Supply  
**Trade name** : SURE STAR  
**Model Number** : SS-400R8P, SS-300R8P  
**Company Name** : SURE STAR COMPUTER CO., LTD.

This product, which has been issued the test report listed as above in QuieTek Laboratory, is based on a single evaluation of one sample and confirmed to comply with the requirements of the following EMC standard.

EN 55022:2006+A1: 2007

EN 61000-3-2:2006

EN 61000-3-3:2008

EN 55024: 1998+A1: 2001+A2: 2003

IEC 61000-4-2: 2008

IEC 61000-4-3: 2008

IEC 61000-4-4: 2004

IEC 61000-4-5: 2005

IEC 61000-4-6: 2008

IEC 61000-4-8: 2009

IEC 61000-4-11: 2004

TEST LABORATORY

Vincent Lin / Manager



## Test Report

Product Name : Industrial Power Supply

Model No. : SS-400R8P, SS-300R8P

Applicant : SURE STAR COMPUTER CO., LTD.

Address : No.2-1 Daan Road Shulin City, Taipei, 238 Taiwan.

Date of Receipt : 2010/05/27

Issued Date : 2010/07/05

Report No. : 106030R-ITCEP07V04

Report Version : V2.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.



# Declaration of Conformity

We herewith confirm the following designated products to comply with the requirements set out in the Council Directive on the approximation of the laws of the Member States relating to Electromagnetic Compatibility Directive (2004/108/EC) with applicable standards listed below.

Product : Industrial Power Supply  
Trade name : SURE STAR  
Model Number : SS-400R8P, SS-300R8P  
Applicable Harmonized : EN 55022:2006+A1: 2007, Class B  
Standards under Directive EN 55024:1998+A1: 2001+A2: 2003  
2004/108/EC EN 61000-3-2:2006  
EN 61000-3-3:2008

Company Name : \_\_\_\_\_  
Company Address : \_\_\_\_\_  
Telephone : \_\_\_\_\_ Facsimile : \_\_\_\_\_

Person in responsible for marking this declaration:

_____ Name (Full Name)	_____ Title/ Department
_____ Date	_____ Legal Signature



## Statement of Conformity

This statement is to certify that the designated product below.

Product : Industrial Power Supply  
Trade name : SURE STAR  
Model Number : SS-400R8P, SS-300R8P  
Company Name : SURE STAR COMPUTER CO., LTD.  
Applicable Standards : EN 55022:2006+A1: 2007, Class B  
EN 55024:1998+A1: 2001+A2: 2003  
EN 61000-3-2:2006  
EN 61000-3-3:2008

One sample of the designated product has been tested and evaluated in our laboratory to find in compliance with the applicable standards above. The issued test report(s) show(s) it in detail.

**Report Number : 106030R-ITCEP07V04**



TEST LABORATORY

Vincent Lin / Manager

The verification is based on a single evaluation of one sample of above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab. Logo.

# Test Report Certification

Issued Date : 2010/07/05  
 Report No. : 106030R-ITCEP07V04



Product Name : Industrial Power Supply  
 Applicant : SURE STAR COMPUTER CO., LTD.  
 Address : No.2-1 Daan Road Shulin City, Taipei, 238 Taiwan.  
 Manufacturer : SURE STAR COMPUTER CO., LTD.  
 Model No. : SS-400R8P, SS-300R8P  
 EUT Rated Voltage : AC 100-240V, 50/60Hz  
 EUT Test Voltage : AC 230V / 50Hz  
 Trade Name : SURE STAR  
 Applicable Standard : EN 55022: 2006+A1: 2007, Class B  
                                   EN 55024: 1998+A1: 2001+A2: 2003  
                                   EN 61000-3-2: 2006  
                                   EN 61000-3-3: 2008  
 Test Result : Complied  
 Performed Location : Quietek Corporation (Linkou Laboratory)  
                                   No.5-22, Ruei-Shu Valley, Ruei-Ping Tsuen Lin Kuo  
                                   Shiang, Taipei, 244 Taiwan, R.O.C.  
                                   TEL:+866-2-8601-3788 / FAX:+886-2-8601-3789

Documented By : Genie Chang  
 ( Senior Adm. Specialist / Genie Chang )

Reviewed By : Jim Sun  
 ( Engineer / Jim Sun )

Approved By : Vincent Lin  
 ( Manager / Vincent Lin )

## Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted (audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scopes:

<b>Taiwan R.O.C.</b>	<b>:</b>	<b>BSMI, NCC, TAF</b>
<b>Germany</b>	<b>:</b>	<b>TUV Rheinland</b>
<b>Norway</b>	<b>:</b>	<b>Nemko, DNV</b>
<b>USA</b>	<b>:</b>	<b>FCC, NVLAP</b>
<b>Japan</b>	<b>:</b>	<b>VCCI</b>

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

### HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.

TEL:+886-3-592-8858 / FAX:+886-3-592-8859

E-Mail : [service@quietek.com](mailto:service@quietek.com)



### LinKou Testing Laboratory :

No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen, Lin-Kou Shiang, Taipei, Taiwan, R.O.C.

TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789

E-Mail : [service@quietek.com](mailto:service@quietek.com)



### Suzhou (China) Testing Laboratory :

No. 99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., Suzhou,China.

TEL : +86-512-6251-5088 / FAX : +86-512-6251-5098

E-Mail : [service@quietek.com](mailto:service@quietek.com)



**TABLE OF CONTENTS**

Description	Page
1. General Information .....	7
1.1. EUT Description.....	7
1.2. Mode of Operation .....	7
1.3. Tested System Details .....	8
1.4. Configuration of Tested System .....	8
1.5. EUT Exercise Software.....	9
2. Technical Test .....	10
2.1. Summary of Test Result.....	10
2.2. List of Test Equipment .....	11
2.3. Measurement Uncertainty.....	14
2.4. Test Environment.....	16
3. Conducted Emission (Main Terminals).....	17
3.1. Test Specification .....	17
3.2. Test Setup.....	17
3.3. Limit.....	17
3.4. Test Procedure .....	18
3.5. Deviation from Test Standard.....	18
3.6. Test Result .....	19
3.7. Test Photograph .....	27
4. Radiated Emission .....	28
4.1. Test Specification .....	28
4.2. Test Setup.....	28
4.3. Limit.....	29
4.4. Test Procedure .....	30
4.5. Deviation from Test Standard.....	30
4.6. Test Result.....	31
4.7. Test Photograph .....	33
5. Harmonic Current Emission .....	34
5.1. Test Specification .....	34
5.2. Test Setup.....	34
5.3. Limit.....	34
5.4. Test Procedure .....	36
5.5. Deviation from Test Standard.....	36
5.6. Test Result.....	37
5.7. Test Photograph .....	39
6. Voltage Fluctuation and Flicker .....	40

6.1.	Test Specification .....	40
6.2.	Test Setup.....	40
6.3.	Limit.....	40
6.4.	Test Procedure .....	41
6.5.	Deviation from Test Standard.....	41
6.6.	Test Result.....	42
6.7.	Test Photograph .....	43
7.	Electrostatic Discharge .....	44
7.1.	Test Specification .....	44
7.2.	Test Setup.....	44
7.3.	Limit.....	44
7.4.	Test Procedure .....	45
7.5.	Deviation from Test Standard.....	45
7.6.	Test Result.....	46
7.7.	Test Photograph .....	47
8.	Radiated Susceptibility .....	48
8.1.	Test Specification .....	48
8.2.	Test Setup.....	48
8.3.	Limit.....	48
8.4.	Test Procedure .....	49
8.5.	Deviation from Test Standard.....	49
8.6.	Test Result.....	50
8.7.	Test Photograph .....	51
9.	Electrical Fast Transient/Burst .....	52
9.1.	Test Specification .....	52
9.2.	Test Setup.....	52
9.3.	Limit.....	52
9.4.	Test Procedure .....	53
9.5.	Deviation from Test Standard.....	53
9.6.	Test Result.....	54
9.7.	Test Photograph .....	55
10.	Surge .....	56
10.1.	Test Specification .....	56
10.2.	Test Setup.....	56
10.3.	Limit.....	56
10.4.	Test Procedure .....	57
10.5.	Deviation from Test Standard.....	57
10.6.	Test Result.....	58

10.7.	Test Photograph .....	59
11.	Conducted Susceptibility .....	60
11.1.	Test Specification .....	60
11.2.	Test Setup.....	60
11.3.	Limit.....	61
11.4.	Test Procedure .....	61
11.5.	Deviation from Test Standard.....	61
11.6.	Test Result.....	62
11.7.	Test Photograph .....	63
12.	Power Frequency Magnetic Field .....	64
12.1.	Test Specification .....	64
12.2.	Test Setup.....	64
12.3.	Limit.....	64
12.4.	Test Procedure .....	64
12.5.	Deviation from Test Standard.....	64
12.6.	Test Result.....	65
12.7.	Test Photograph .....	66
13.	Voltage Dips and Interruption.....	67
13.1.	Test Specification .....	67
13.2.	Test Setup.....	67
13.3.	Limit.....	67
13.4.	Test Procedure .....	68
13.5.	Deviation from Test Standard.....	68
13.6.	Test Result.....	69
13.7.	Test Photograph .....	70
14.	Attachment .....	71
	EUT Photograph.....	71

## 1. General Information

### 1.1. EUT Description

Product Name	Industrial Power Supply
Trade Name	SURE STAR
Model No.	SS-400R8P, SS-300R8P

### 1.2. Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:


Pre-Test Mode	
Mode 1: Full Load	
Final Test Mode	
Emission	Mode 1: Full Load
Immunity	Mode 1: Full Load

**1.3. Tested System Details**

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Power test Fixture	D-RAM	DBS-2200	N/A	Non-Shielded 0.8m

**1.4. Configuration of Tested System**

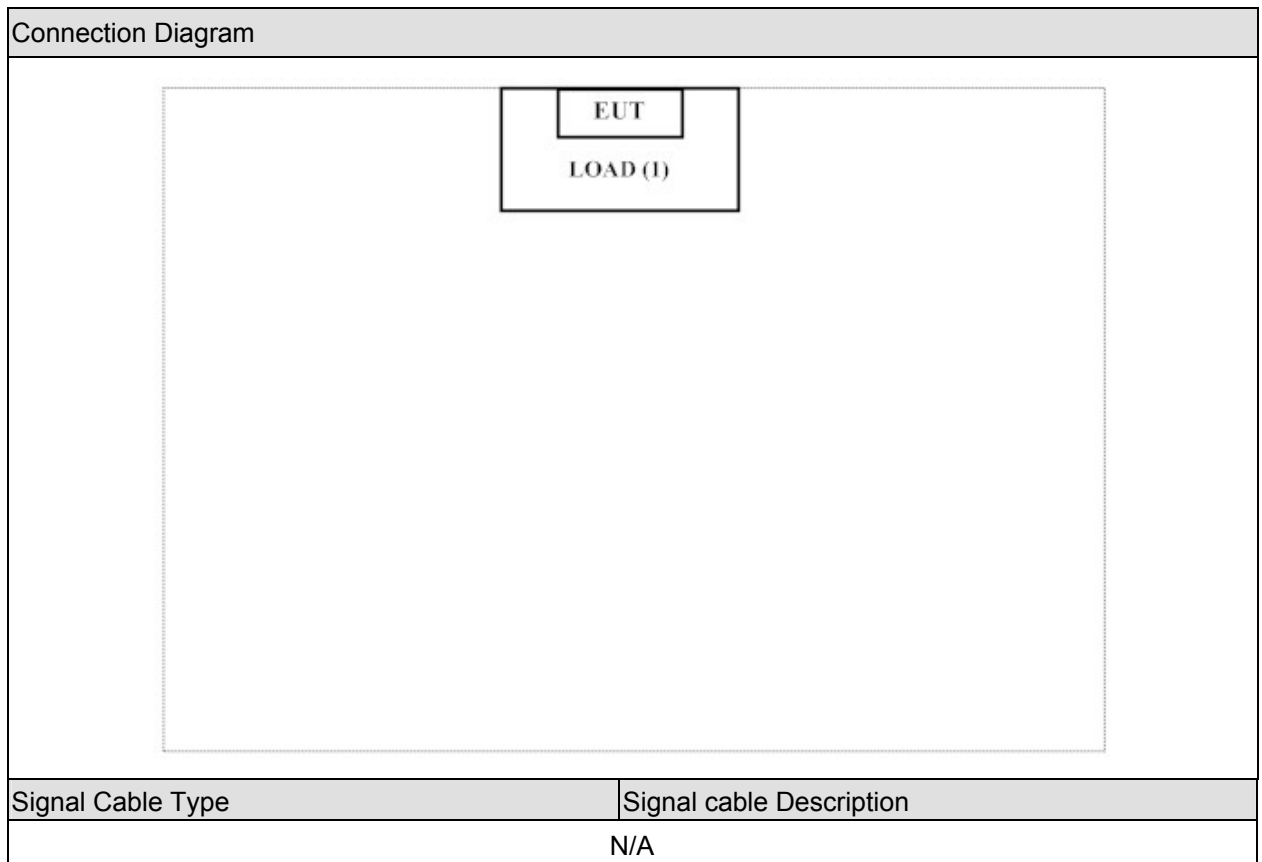

**1.5. EUT Exercise Software**

1	Setup the EUT and simulators as shown on 1.4.
2	Turn on the power of all equipment.
3	A multi meter was used to verify the model operation before the measurement.

## 2. Technical Test

### 2.1. Summary of Test Result

- No deviations from the test standards  
 Deviations from the test standards as below description:

Emission			
Performed Item	Normative References	Test Performed	Deviation
Conducted Emission	EN 55022:2006+A1: 2007	Yes	No
Impedance Stabilization Network	EN 55022:2006+A1: 2007	No	No
Radiated Emission	EN 55022:2006+A1: 2007	Yes	No
Power Harmonics	EN 61000-3-2: 2006	Yes	No
Voltage Fluctuation and Flicker	EN 61000-3-3: 2008	Yes	No

Immunity			
Performed Item	Normative References	Test Performed	Deviation
Electrostatic Discharge	IEC 61000-4-2: 2008	Yes	No
Radiated susceptibility	IEC 61000-4-3: 2008	Yes	No
Electrical fast transient/burst	IEC 61000-4-4: 2004	Yes	No
Surge	IEC 61000-4-5: 2005	Yes	No
Conducted susceptibility	IEC 61000-4-6: 2008	Yes	No
Power frequency magnetic field	IEC 61000-4-8: 2009	Yes	No
Voltage dips and interruption	IEC 61000-4-11: 2004	Yes	No

## 2.2. List of Test Equipment

### Conducted Emission / SR1

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
EMI Test Receiver	R&S	ESCS 30	100366	2009/10/29
LISN	R&S	ENV4200	833209/007	2009/08/14
LISN	R&S	ENV216	100085	2010/02/17
Pulse Limiter	R&S	ESH3-Z2	357.88.10.52	2009/09/10

### Radiated Emission / Site6

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Bilog Antenna	Schaffner Chase	CBL6112B	2909	2009/08/01
Broadband Horn Antenna	Schwarzbeck	BBHA9170	209	2009/07/25
EMI Test Receiver	R&S	ESCS 30	100368	2009/08/22
Horn Antenna	Schwarzbeck	BBHA9120D	305	2009/08/26
Pre-Amplifier	QTK	AP-025C	0506002	2009/08/01
Spectrum Analyzer	Advantest	R3162	120300652	2010/06/25

### Power Harmonics / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
AC Power Source(Harmonic)	Schaffner	NSG 1007	HK54148	2009/08/11
IEC1000-4-X Analyzer(Flicker)	Schaffner	CCN 1000-1	X7 1887	2009/08/11

### Voltage Fluctuation and Flicker / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
AC Power Source(Harmonic)	Schaffner	NSG 1007	HK54148	2009/08/11
IEC1000-4-X Analyzer(Flicker)	Schaffner	CCN 1000-1	X7 1887	2009/08/11

### Electrostatic Discharge / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
ESD Simulator System	Noiseken	TC-815R	ESS0929097	2009/07/06
Horizontal Coupling Plane(HCP)	Quietek	HCP AL50	N/A	N/A
Vertical Coupling Plane(VCP)	Quietek	VCP AL50	N/A	N/A

## Radiated susceptibility / CB5

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
AF-BOX	R&S	AF-BOX ACCUST	100007	N/A
Audio Analyzer	R&S	UPL 16	100137	2010/04/15
Biconilog Antenna	EMCO	3149	00071675	N/A
Directional Coupler	A&R	DC 6180	22735	N/A
Dual Microphone Supply	B&K	5935	2426784	2010/04/16
Mouth Simulator	B&K	4227	2439692	2010/04/16
Power Amplifier	A&R	30S1G3	309453	N/A
Power Amplifier	A&R	100W10000M7	A285000010	N/A
Power Amplifier	SCHAFFNER	CBA9413B	4020	N/A
Power Amplifier	AR	75A250A	0325371	N/A
Power Meter	R&S	NRVD(P.M)	100219	2010/04/16
Pre-Amplifier	A&R	150A220	23067	N/A
Probe Microphone	B&K	4182	2278070	2010/04/16
Signal Generator	R&S	SML03	103330	2009/09/08

## Electrical fast transient/burst / SR2

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Schaffner NSG 2050 System Mainframe	Schaffner	N/A	N/A	2010/01/12

## Surge / SR2

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Schaffner NSG 2050 System Mainframe	Schaffner	N/A	N/A	2010/01/12

## Conducted susceptibility / SR6

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Schaffner NSG 2070 RF-Generator	Schaffner	N/A	N/A	2010/04/21

## Power frequency magnetic field / SR3

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Induction Coil Interface	Schaffner	INA 2141	6002	N/A
Magnetic Loop Coil	Schaffner	INA 702	160	N/A
Triaxial ELF Magnetic Field Meter	F.B.BELL	4090	114135	2010/03/27

## Voltage dips and interruption / SR2

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Schaffner NSG 2050 System Mainframe	Schaffner	N/A	N/A	2010/01/12

Schaffner NSG 2050 System Mainframe				
Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Burst 4.8KV/16A Generator with CDN	Schaffner	PNW2225	200123-098SC	2010/01/15
Damped osc. Wave 100kHz and 1MHz	Schaffner	PNW2056	200124-058SC	2010/01/13
Double AC Source Variator	Schaffner	NSG 642A	30910014938	2010/01/20
Hybrid surge pulse 1.2/50uS	Schaffner	PNW 2050	200532-514LU	2010/01/22
PQT Generator	Schaffner	PNW2003	200138-007SC	2010/01/20
Pulse COUPLING NETWORK	Schaffner	CDN131	200124-007SC	2010/01/22

Schaffner NSG 2070 RF-Generator				
Instrument	Manufacturer	Type No.	Serial No	Cal. Date
CDN	Schaffner	CAL U100A	20405	N/A
CDN	Schaffner	TRA U150	20454	N/A
CDN M016S	Schaffner	CAL U100A	20410	N/A
CDN M016S	Schaffner	TRA U150	21167	N/A
CDN T002	Schaffner	CAL U100	20491	N/A
CDN T002	Schaffner	TRA U150	21169	N/A
CDN T400	Schaffner	CAL U100	17735	N/A
CDN T400	Schaffner	TRA U150	21166	N/A
Coupling Decoupling Network	Schaffner	CDN M016S	20823	2010/04/02
Coupling Decoupling Network	Schaffner	CDN T002	19018	2010/04/02
Coupling Decoupling Network	Schaffner	CDN T400	21226	2010/04/02
EM-CLAMP	Schaffner	KEMZ 801	21024	2010/04/02

## 2.3. Measurement Uncertainty

### Conducted Emission

The measurement uncertainty is evaluated as  $\pm 2.26$  dB.

### Radiated Emission

The measurement uncertainty is evaluated as  $\pm 3.19$  dB.

### Electrostatic Discharge

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in ESD testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant ESD standards. The immunity test signal from the ESD system meet the required specifications in IEC 61000-4-2 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 1.63 % and 2.76%.

### Radiated susceptibility

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in RS testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant RS standards. The immunity test signal from the RS system meet the required specifications in IEC 61000-4-3 through the calibration for the uniform field strength and monitoring for the test level with the uncertainty evaluation report for the electrical field strength as being 2.72 dB.

### Electrical fast transient/burst

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in EFT/Burst testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant EFT/Burst standards. The immunity test signal from the EFT/Burst system meet the required specifications in IEC 61000-4-4 through the calibration report with the calibrated uncertainty for the waveform of voltage, frequency and timing as being 1.63 % and 2.76%.

### Surge

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in Surge testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant Surge standards. The immunity test signal from the Surge system meet the required specifications in IEC 61000-4-5 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 1.63 % and 2.76%.

#### Conducted susceptibility

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in CS testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant CS standards. The immunity test signal from the CS system meet the required specifications in IEC 61000-4-6 through the calibration for unmodulated signal and monitoring for the test level with the uncertainty evaluation report for the injected modulated signal level through CDN and EM Clamp/Direct Injection as being 3.72 dB and 2.78 dB.

#### Power frequency magnetic field

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in PFM testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant PFM standards. The immunity test signal from the PFM system meet the required specifications in IEC 61000-4-8 through the calibration report with the calibrated uncertainty for the Gauss Meter to verify the output level of magnetic field strength as being 2 %.

#### Voltage dips and interruption

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in DIP testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant DIP standards. The immunity test signal from the DIP system meet the required specifications in IEC 61000-4-11 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 1.63 % and 2.76%.

## 2.4. Test Environment


Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	50
	Barometric pressure (mbar)	860-1060	950-1000
Radiated Emission	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	50
	Barometric pressure (mbar)	860-1060	950-1000
Electrostatic Discharge	Temperature (°C)	15-35	23
	Humidity (%RH)	30-60	55
	Barometric pressure (mbar)	860-1060	950-1000
Radiated susceptibility	Temperature (°C)	15-35	24
	Humidity (%RH)	25-75	54
	Barometric pressure (mbar)	860-1060	950-1000
Electrical fast transient/burst	Temperature (°C)	15-35	21
	Humidity (%RH)	25-75	54
	Barometric pressure (mbar)	860-1060	950-1000
Surge	Temperature (°C)	15-35	21
	Humidity (%RH)	10-75	54
	Barometric pressure (mbar)	860-1060	950-1000
Conducted susceptibility	Temperature (°C)	15-35	21
	Humidity (%RH)	25-75	54
	Barometric pressure (mbar)	860-1060	950-1000
Power frequency magnetic field	Temperature (°C)	15-35	24
	Humidity (%RH)	25-75	55
	Barometric pressure (mbar)	860-1060	950-1000
Voltage dips and interruption	Temperature (°C)	15-35	21
	Humidity (%RH)	25-75	54
	Barometric pressure (mbar)	860-1060	950-1000

### 3. Conducted Emission (Main Terminals)

#### 3.1. Test Specification

According to EMC Standard : EN 55022

#### 3.2. Test Setup

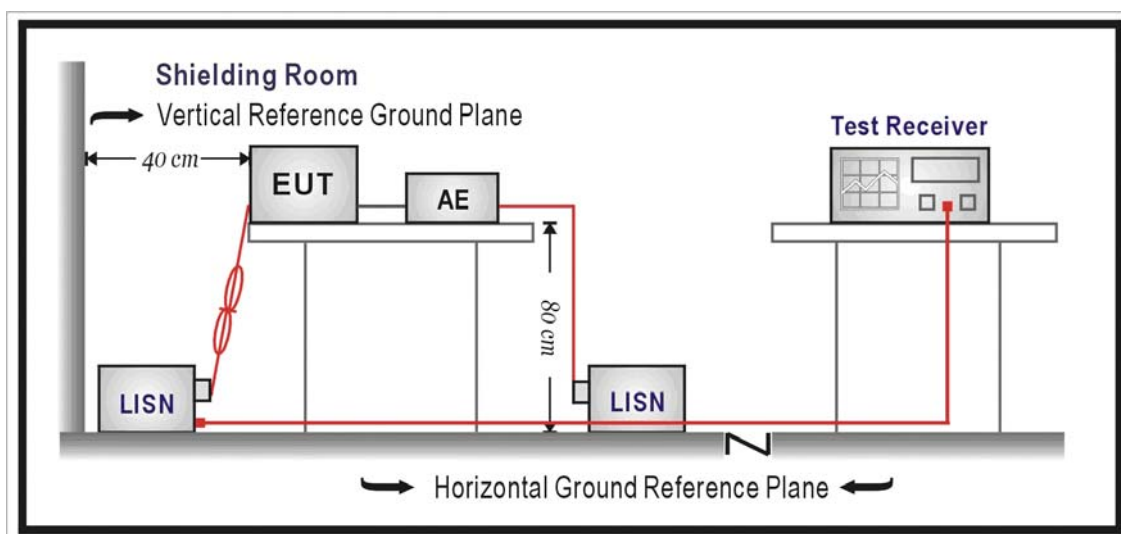

#### 3.3. Limit

Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

### 3.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

(Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed on conducted measurement.


Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

### 3.5. Deviation from Test Standard


No deviation.

**3.6. Test Result**

Site : SR1	Time : 2010/06/04 - 16:07
Limit : CISPR_B_00M_QP	Margin : 10
EUT : Industrial Power Supply	Probe : ENV_216_L1 - Line1
Power : AC 230V/50Hz	Note : Mode 1

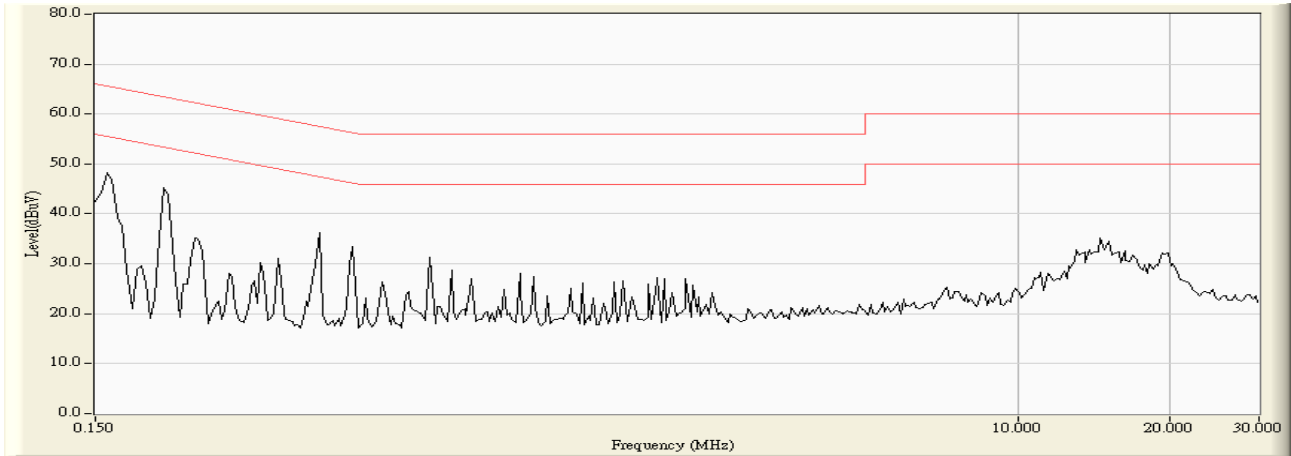

Site : SR1	Time : 2010/06/04 - 16:10
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Industrial Power Supply	Probe : ENV_216_L1 - Line1
Power : AC 230V/50Hz	Note : Mode 1

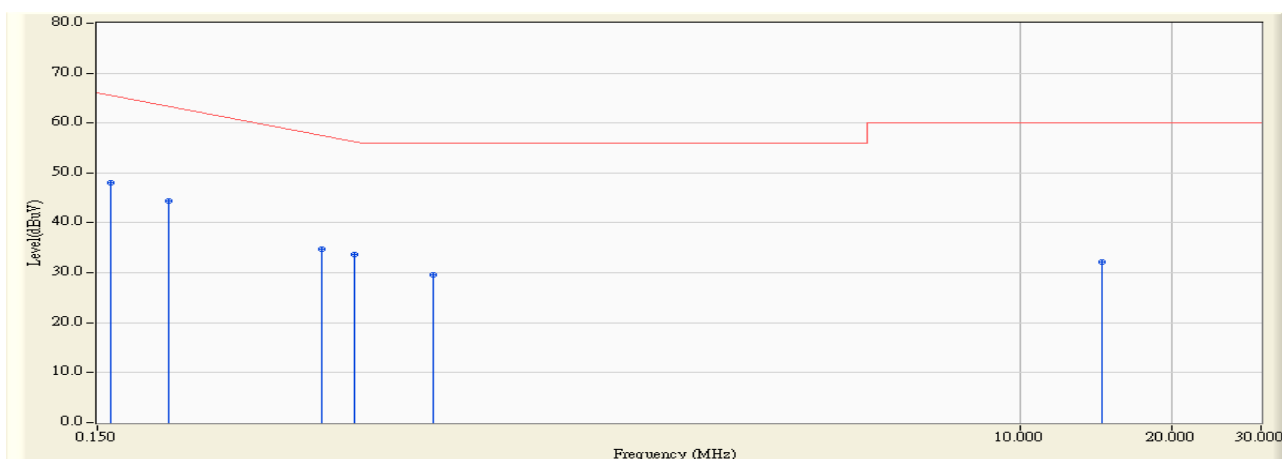


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.159	9.790	38.300	48.090	-17.653	65.743	QUASIPeAK
2		0.207	9.790	34.510	44.300	-20.071	64.371	QUASIPeAK
3		0.416	9.790	24.890	34.680	-23.720	58.400	QUASIPeAK
4		0.485	9.790	23.790	33.580	-22.849	56.429	QUASIPeAK
5		0.693	9.790	19.840	29.630	-26.370	56.000	QUASIPeAK
6		14.513	10.110	22.080	32.190	-27.810	60.000	QUASIPeAK

**Note:**

1. All Reading Levels are Quasi-Peak and average value.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR1	Time : 2010/06/04 - 16:10
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Industrial Power Supply	Probe : ENV_216_L1 - Line1
Power : AC 230V/50Hz	Note : Mode 1

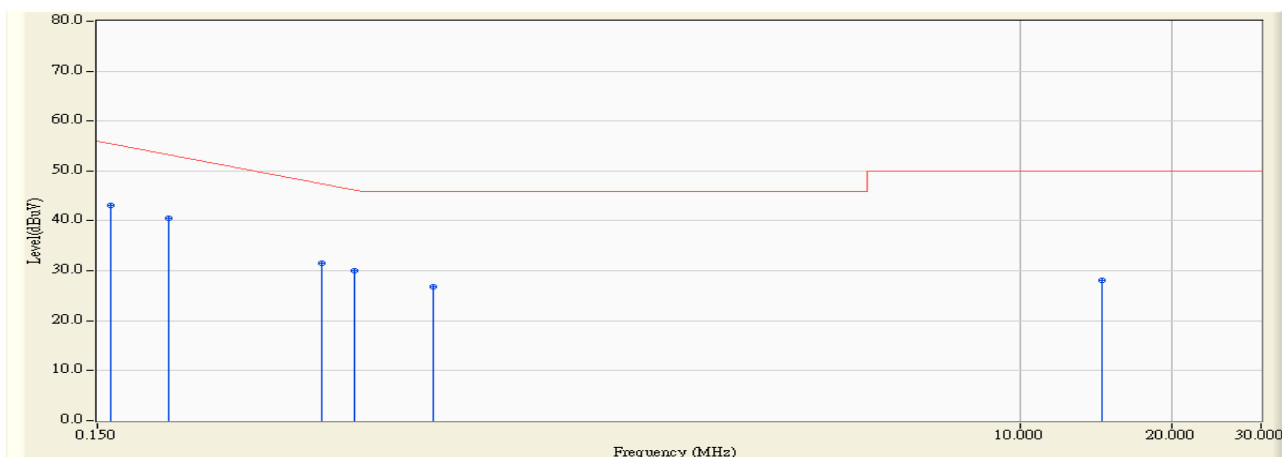


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.159	9.790	33.370	43.160	-12.583	55.743	AVERAGE
2		0.207	9.790	30.810	40.600	-13.771	54.371	AVERAGE
3		0.416	9.790	21.700	31.490	-16.910	48.400	AVERAGE
4		0.485	9.790	20.300	30.090	-16.339	46.429	AVERAGE
5		0.693	9.790	17.080	26.870	-19.130	46.000	AVERAGE
6		14.513	10.110	17.970	28.080	-21.920	50.000	AVERAGE


**Note:**

1. All Reading Levels are Quasi-Peak and average value.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR1	Time : 2010/06/04 - 16:11
Limit : CISPR_B_00M_QP	Margin : 10
EUT : Industrial Power Supply	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 1

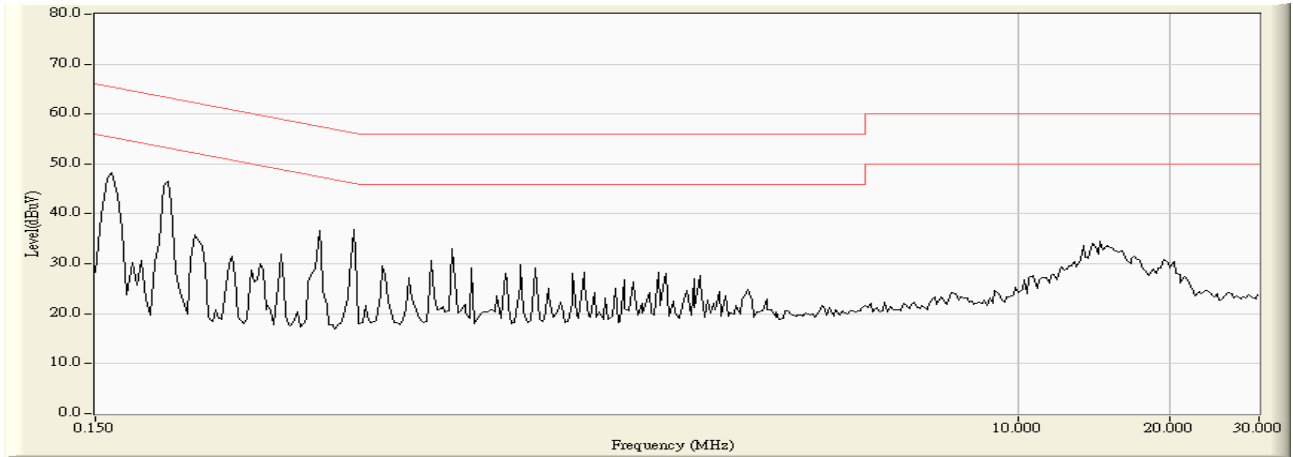

Site : SR1	Time : 2010/06/04 - 16:12
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Industrial Power Supply	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 1

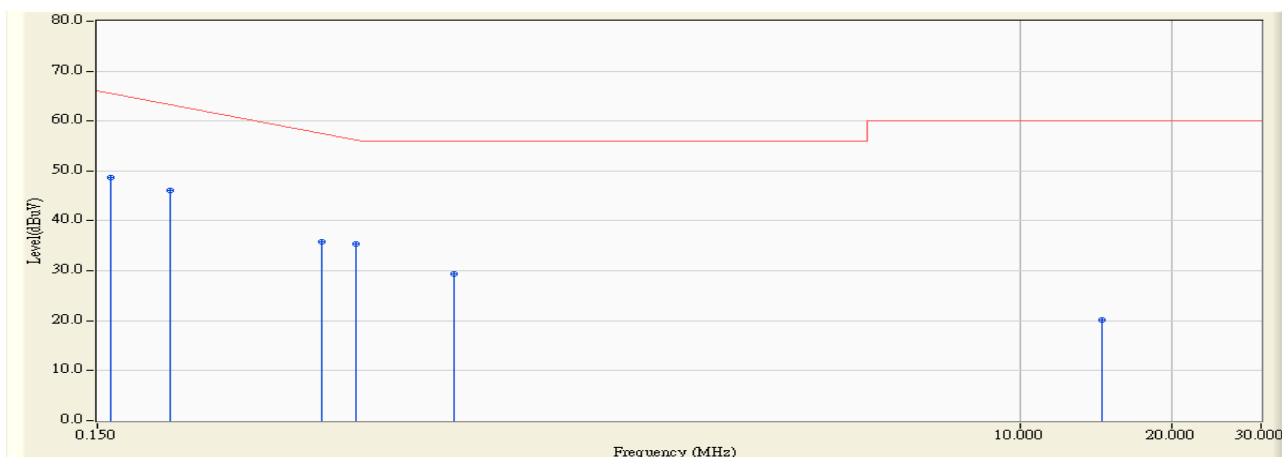


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.159	9.780	38.830	48.610	-17.133	65.743	QUASIPeAK
2		0.209	9.780	36.310	46.090	-18.224	64.314	QUASIPeAK
3		0.416	9.790	26.050	35.840	-22.560	58.400	QUASIPeAK
4		0.486	9.790	25.510	35.300	-21.100	56.400	QUASIPeAK
5		0.763	9.790	19.530	29.320	-26.680	56.000	QUASIPeAK
6		14.525	10.160	10.050	20.210	-39.790	60.000	QUASIPeAK

**Note:**

1. All Reading Levels are Quasi-Peak and average value.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR1	Time : 2010/06/04 - 16:12
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Industrial Power Supply	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 1

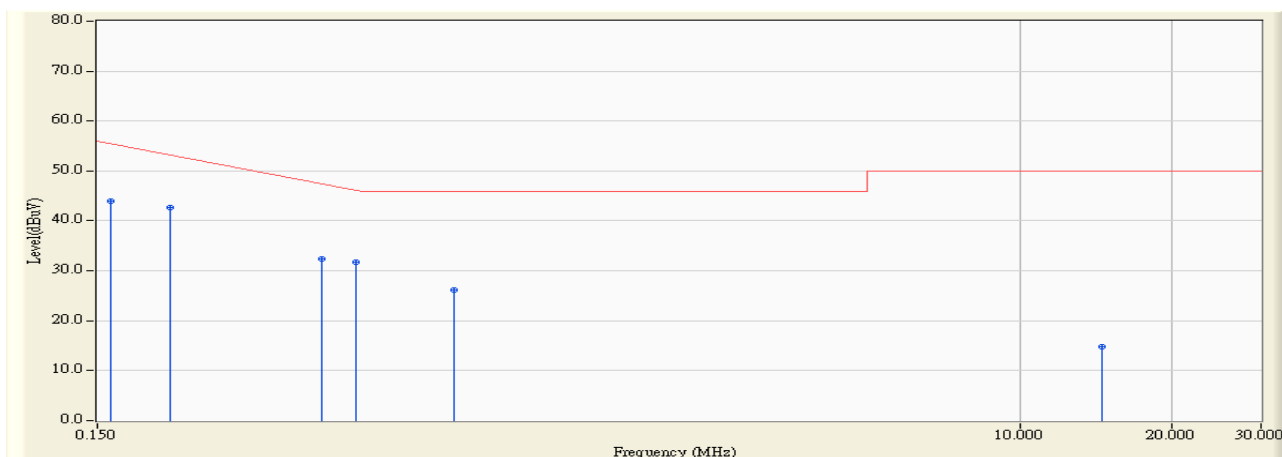


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.159	9.780	34.140	43.920	-11.823	55.743	AVERAGE
2	*	0.209	9.780	32.800	42.580	-11.734	54.314	AVERAGE
3		0.416	9.790	22.580	32.370	-16.030	48.400	AVERAGE
4		0.486	9.790	21.910	31.700	-14.700	46.400	AVERAGE
5		0.763	9.790	16.330	26.120	-19.880	46.000	AVERAGE
6		14.525	10.160	4.540	14.700	-35.300	50.000	AVERAGE

**Note:**

1. All Reading Levels are Quasi-Peak and average value.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR1	Time : 2010/06/04 - 16:12
Limit : CISPR_B_00M_QP	Margin : 0
EUT : Industrial Power Supply	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 1

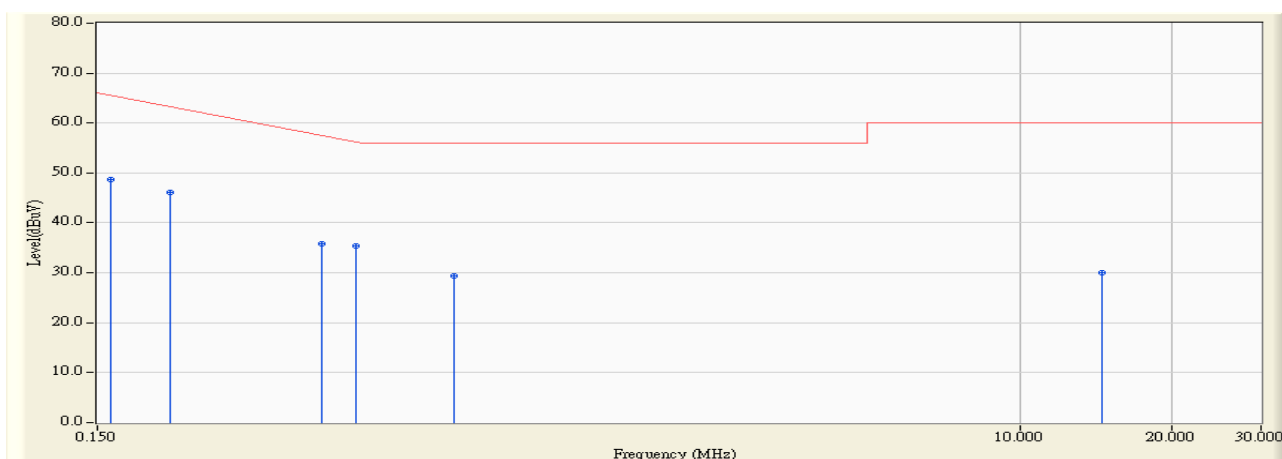


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.159	9.780	38.830	48.610	-17.133	65.743	QUASIPeAK
2		0.209	9.780	36.310	46.090	-18.224	64.314	QUASIPeAK
3		0.416	9.790	26.050	35.840	-22.560	58.400	QUASIPeAK
4		0.486	9.790	25.510	35.300	-21.100	56.400	QUASIPeAK
5		0.763	9.790	19.530	29.320	-26.680	56.000	QUASIPeAK
6		14.580	10.160	19.870	30.030	-29.970	60.000	QUASIPeAK

**Note:**

1. All Reading Levels are Quasi-Peak and average value.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : SR1	Time : 2010/06/04 - 16:12
Limit : CISPR_B_00M_AV	Margin : 0
EUT : Industrial Power Supply	Probe : ENV_216_N - Line2
Power : AC 230V/50Hz	Note : Mode 1

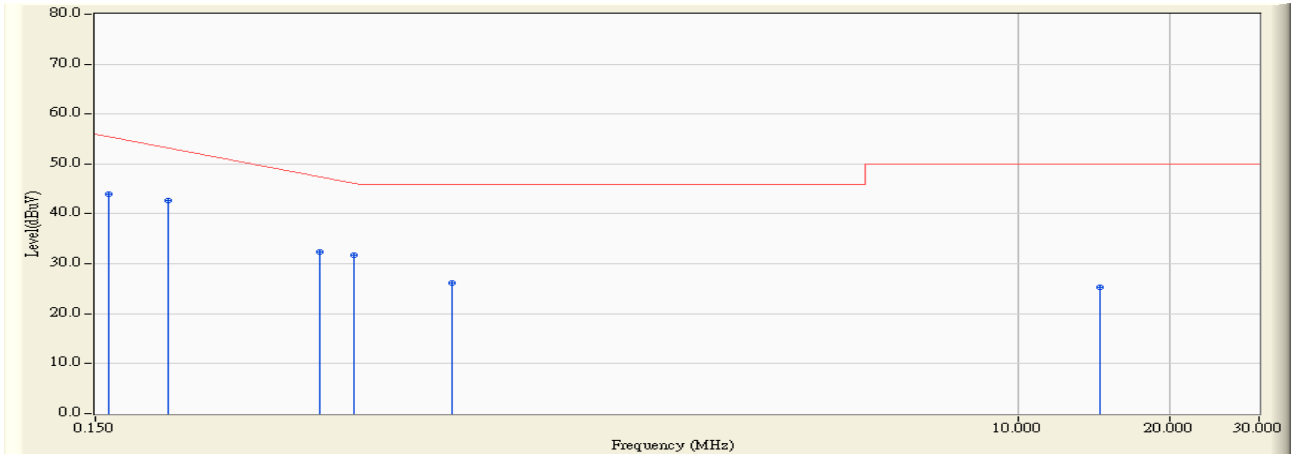

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.159	9.780	34.140	43.920	-11.823	55.743	AVERAGE
2	*	0.209	9.780	32.800	42.580	-11.734	54.314	AVERAGE
3		0.416	9.790	22.580	32.370	-16.030	48.400	AVERAGE
4		0.486	9.790	21.910	31.700	-14.700	46.400	AVERAGE
5		0.763	9.790	16.330	26.120	-19.880	46.000	AVERAGE
6		14.580	10.160	15.110	25.270	-24.730	50.000	AVERAGE

**Note:**

1. All Reading Levels are Quasi-Peak and average value.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

### 3.7. Test Photograph

Test Mode : Mode 1: Full Load

Description : Front View of Conducted Test



Test Mode : Mode 1: Full Load

Description : Front View of Conducted Test




## 4. Radiated Emission


### 4.1. Test Specification

According to EMC Standard : EN 55022

### 4.2. Test Setup

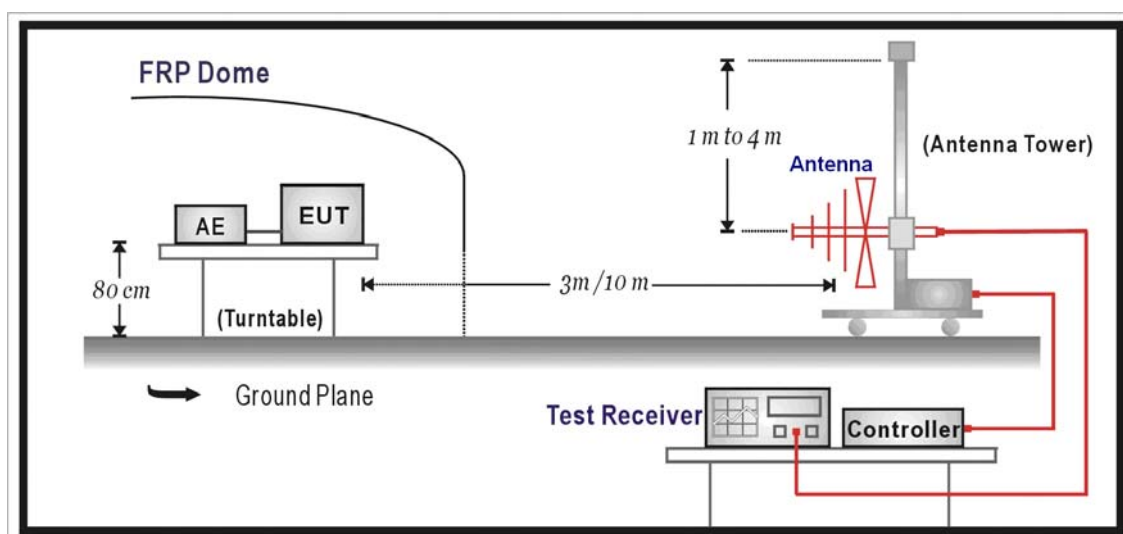

Above 1GHz Test Setup:

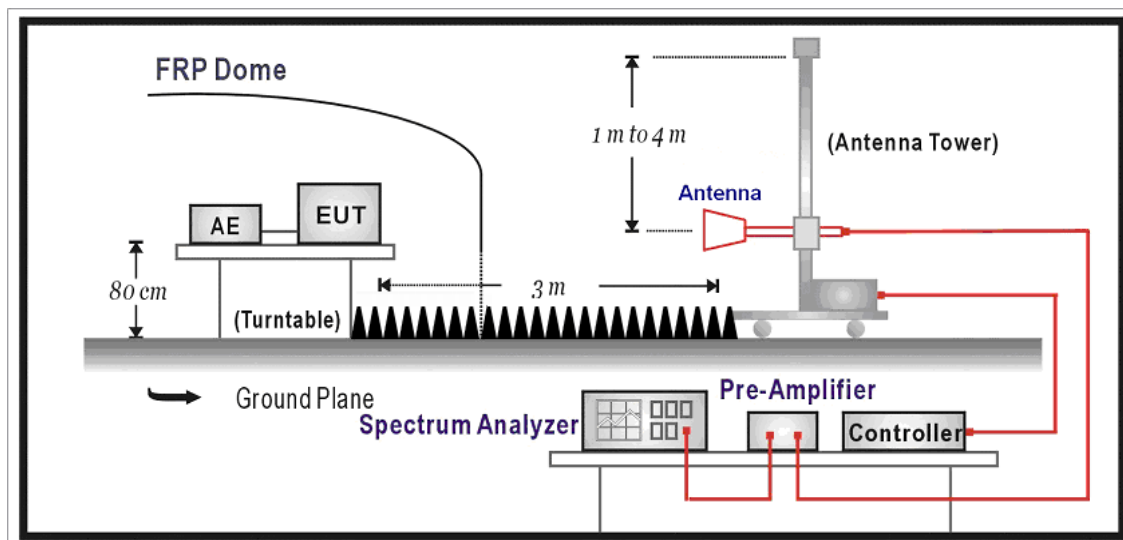

**4.3. Limit**

Limits		
Frequency (MHz)	Distance (m)	dBuV/m
30 – 230	10	30
230 – 1000	10	37

Limits			
Frequency (GHz)	Distance (m)	Peak (dBuV/m)	Average (dBuV/m)
1 – 3	3	70	50
3 – 6	3	74	54

Remark:

1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 6 GHz, whichever is lower

#### 4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3/10 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.

Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120kHz and above 1GHz using a receiver bandwidth of 1MHz.

30MHz to 1GHz Radiated was performed at an antenna to EUT distance of 10 meters.

Above 1GHz Radiated was performed at an antenna to EUT distance of 3 meters.


It is placed with absorb on the ground between EUT and Antenna.

#### 4.5. Deviation from Test Standard

No deviation.

4.6. Test Result

Site : OATS-6	Time : 2010/06/08 - 20:15
Limit : CISPR_B_10M_QP	Margin : 6
EUT : Industrial Power Supply	Probe : Site6_CBL6112_0811_10m - HORIZONTAL
Power : AC 230/50Hz	Note : Mode 1

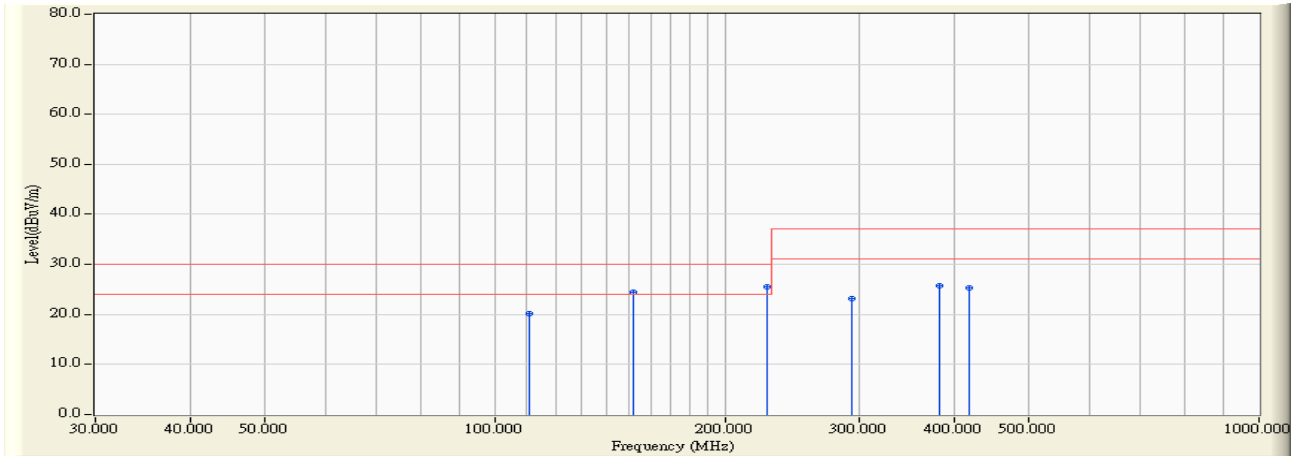


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	110.977	14.311	5.900	20.210	-9.790	30.000	QUASPEAK
2	151.805	13.550	10.800	24.350	-5.650	30.000	QUASPEAK
3	* 227.169	15.927	9.600	25.527	-4.473	30.000	QUASPEAK
4	293.608	19.241	3.900	23.140	-13.860	37.000	QUASPEAK
5	382.362	20.506	5.200	25.706	-11.294	37.000	QUASPEAK
6	417.470	22.591	2.700	25.291	-11.709	37.000	QUASPEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Site : OATS-6	Time : 2010/06/08 - 20:13
Limit : CISPR_B_10M_QP	Margin : 6
EUT : Industrial Power Supply	Probe : Site6_CBL6112_0811_10m - VERTICAL
Power : AC 230/50Hz	Note : Mode 1

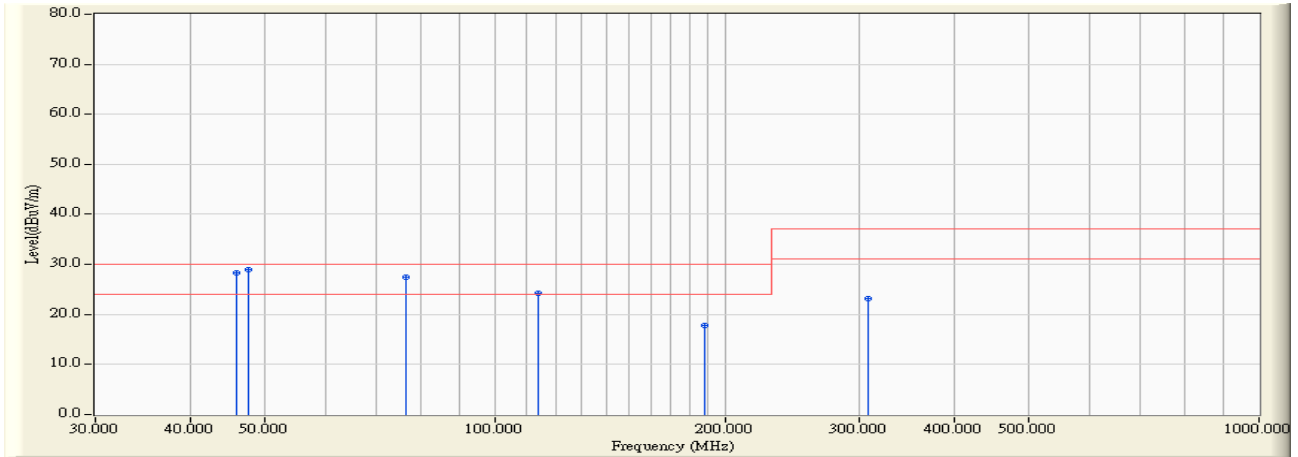

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		45.817	15.312	12.900	28.212	-1.788	30.000	QUASIPeAK
2	*	47.582	11.577	17.300	28.877	-1.123	30.000	QUASIPeAK
3		76.472	10.829	16.600	27.429	-2.571	30.000	QUASIPeAK
4		113.847	16.972	7.300	24.272	-5.728	30.000	QUASIPeAK
5		188.424	12.634	5.100	17.734	-12.266	30.000	QUASIPeAK
6		307.941	18.184	5.000	23.185	-13.815	37.000	QUASIPeAK

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

**4.7. Test Photograph**

Test Mode : Mode 1: Full Load

Description : Front View of Radiated Test



Test Mode : Mode 1: Full Load

Description : Back View of Radiated Test




## 5. Harmonic Current Emission

### 5.1. Test Specification

According to EMC Standard : EN 61000-3-2

### 5.2. Test Setup

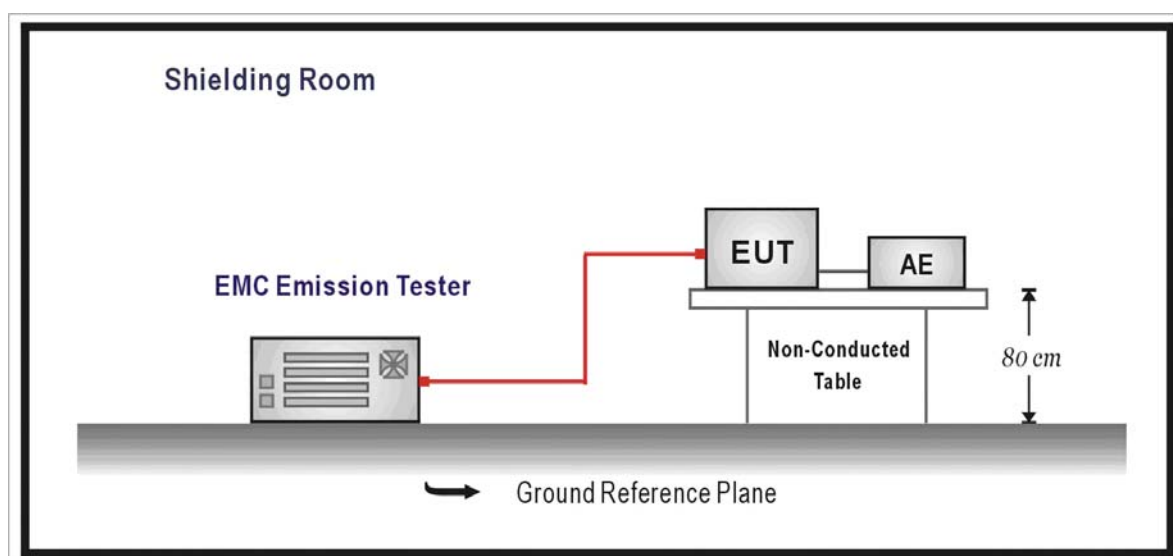

### 5.3. Limit

(a) Limits of Class A Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current A	Harmonics Order n	Maximum Permissible harmonic current A
Odd harmonics		Even harmonics	
3	2.30	2	1.08
5	1.14	4	0.43
7	0.77	6	0.30
9	0.40	$8 \leq n \leq 40$	$0.23 * 8/n$
11	0.33		
13	0.21		
$15 \leq n \leq 39$	$0.15 * 15/n$		

(b) Limits of Class B Harmonics Currents

For Class B equipment, the harmonic of the input current shall not exceed the maximum permissible values given in table that is the limit of Class A multiplied by a factor of 1.5.

(c) Limits of Class C Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current Expressed as a percentage of the input current at the fundamental frequency %
2	2
3	$30 \cdot \lambda^*$
5	10
7	7
9	5
$11 \leq n \leq 39$ (odd harmonics only)	3
* $\lambda$ is the circuit power factor	

(d) Limits of Class D Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current per watt mA/W	Maximum Permissible harmonic current A
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
$11 \leq n \leq 39$ (odd harmonics only)	$3.85/n$	See limit of Class A

**5.4. Test Procedure**

The EUT is supplied in series with power analyzer from a power source having the same normal voltage and frequency as the rated supply voltage and the equipment under test. And the rated voltage at the supply voltage of EUT of 0.94 times and 1.06 times shall be performed.

**5.5. Deviation from Test Standard**


No deviation.

5.6. Test Result

Product	Industrial Power Supply		
Test Item	Power Harmonics		
Test Mode	Mode 1: Full Load		
Date of Test	2010/06/10	Test Site	No.3 Shielded Room


Test Result: Pass                      Source qualification: Normal

Current & voltage waveforms

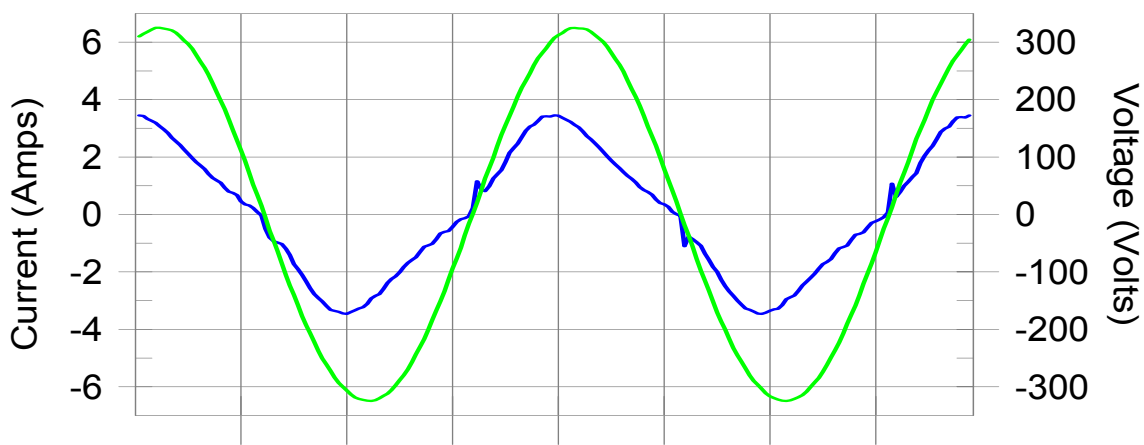

Harmonics and Class A limit line

European Limits

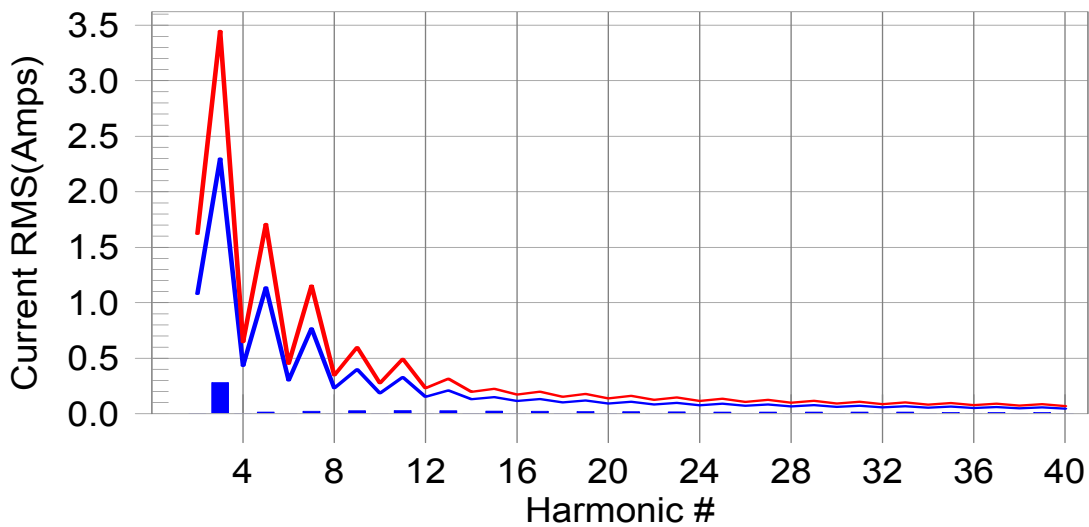

Test result: Pass                      Worst harmonic was #39 with 21.01% of the limit.

Test Result: Pass                      Source qualification: Normal  
 THC(A): 0.29                      I-THD(%): 13.46                      POHC(A): 0.047                      POHC Limit(A): 0.251  
 Highest parameter values during test:

V_RMS (Volts):	229.61	Frequency(Hz):	50.00
I_Peak (Amps):	3.517	I_RMS (Amps):	2.195
I_Fund (Amps):	2.175	Crest Factor:	1.603
Power (Watts):	487.2	Power Factor:	0.967

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	1.080	0.1	0.002	1.620	0.11	Pass
3	0.279	2.300	12.1	0.281	3.450	8.15	Pass
4	0.000	0.430	0.1	0.000	0.645	0.06	Pass
5	0.014	1.140	1.3	0.015	1.710	0.86	Pass
6	0.000	0.300	0.1	0.000	0.450	0.07	Pass
7	0.023	0.770	3.0	0.023	1.155	2.03	Pass
8	0.000	0.230	0.1	0.000	0.345	0.10	Pass
9	0.027	0.400	6.9	0.028	0.600	4.67	Pass
10	0.000	0.184	0.1	0.000	0.276	0.12	Pass
11	0.028	0.330	8.5	0.028	0.495	5.72	Pass
12	0.000	0.153	0.2	0.000	0.230	0.16	Pass
13	0.027	0.210	12.6	0.027	0.315	8.52	Pass
14	0.000	0.131	0.2	0.000	0.197	0.18	Pass
15	0.024	0.150	16.1	0.024	0.225	10.89	Pass
16	0.000	0.115	0.4	0.001	0.173	0.35	Pass
17	0.022	0.132	16.7	0.022	0.199	11.22	Pass
18	0.001	0.102	0.5	0.001	0.153	0.48	Pass
19	0.020	0.118	16.9	0.020	0.178	11.46	Pass
20	0.000	0.092	0.5	0.001	0.138	0.48	Pass
21	0.018	0.107	16.9	0.018	0.161	11.42	Pass
22	0.000	0.084	0.4	0.001	0.125	0.42	Pass
23	0.016	0.098	16.8	0.017	0.147	11.51	Pass
24	0.000	0.077	0.4	0.000	0.115	0.39	Pass
25	0.016	0.090	17.3	0.016	0.135	12.21	Pass
26	0.000	0.071	0.6	0.001	0.106	0.62	Pass
27	0.015	0.083	18.3	0.016	0.125	12.85	Pass
28	0.000	0.066	0.8	0.001	0.099	0.80	Pass
29	0.015	0.078	19.5	0.016	0.116	13.51	Pass
30	0.001	0.061	0.9	0.001	0.092	1.08	Pass
31	0.015	0.073	20.5	0.015	0.109	14.08	Pass
32	0.001	0.058	1.2	0.001	0.086	1.27	Pass
33	0.014	0.068	21.0	0.015	0.102	14.40	Pass
34	0.000	0.054	0.7	0.001	0.081	0.82	Pass
35	0.013	0.064	20.3	0.013	0.096	13.84	Pass
36	0.001	0.051	1.3	0.001	0.077	1.52	Pass
37	0.012	0.061	20.1	0.013	0.091	14.09	Pass
38	0.000	0.048	0.8	0.001	0.073	0.85	Pass
39	0.012	0.058	21.0	0.013	0.087	14.43	Pass
40	0.001	0.046	1.3	0.001	0.069	1.32	Pass

1.Dynamic limits were applied for this test. The highest harmonics values in the above table may not occur at the same window as the maximum harmonics/limit ratio.

2:According to EN61000-3-2 paragraph 7 the note 1 and 2 are valid for all applications having an active input power >75W. Others the result should be pass.

**5.7. Test Photograph**

Test Mode : Mode 1: Full Load

Description : Power Harmonics Test Setup




## 6. Voltage Fluctuation and Flicker

### 6.1. Test Specification

According to EMC Standard : EN 61000-3-3

### 6.2. Test Setup

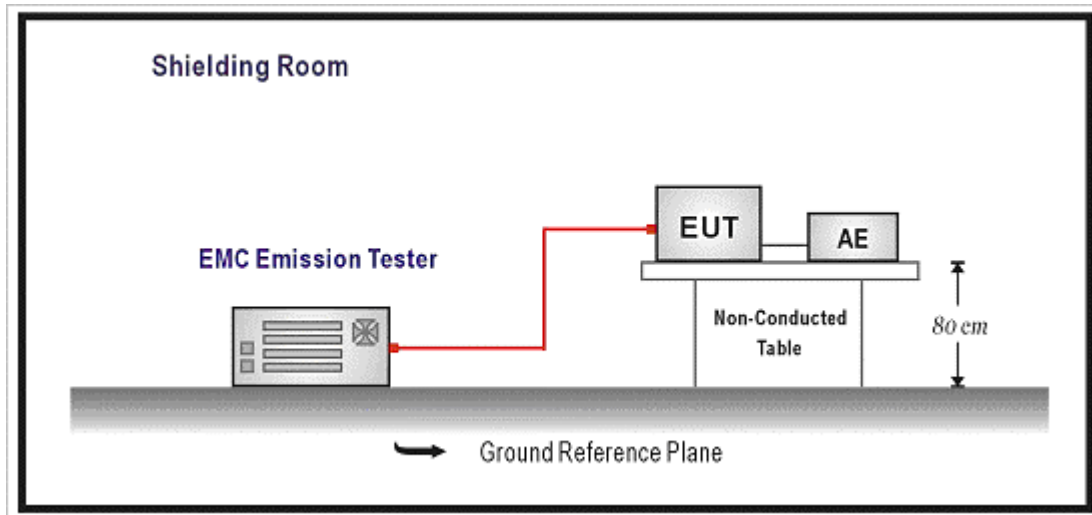

### 6.3. Limit

The following limits apply:

- the value of  $P_{st}$  shall not be greater than 1.0;
  - the value of  $P_{1t}$  shall not be greater than 0.65;
  - the value of  $d(t)$  during a voltage change shall not exceed 3.3 % for more than 500 ms;
  - the relative steady-state voltage change,  $d_c$ , shall not exceed 3.3 %;
  - the maximum relative voltage change,  $d_{max}$ , shall not exceed;
- a) 4 % without additional conditions;
  - b) 6 % for equipment which is:
    - switched manually, or
    - switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.

NOTE The cycling frequency will be further limited by the  $P_{st}$  and  $P_{1t}$  limit.

For example: a  $d_{max}$  of 6% producing a rectangular voltage change characteristic twice per hour will give a  $P_{1t}$  of about 0.65.

- c) 7 % for equipment which is:
- attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or
  - switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

$P_{st}$  and  $P_{1t}$  requirements shall not be applied to voltage changes caused by manual switching.

#### **6.4. Test Procedure**

The EUT is supplied in series with power analyzer from a power source having the same normal voltage and frequency as the rated supply voltage and the equipment under test. And the rated voltage at the supply voltage of EUT of 0.94 times and 1.06 times shall be performed.

#### **6.5. Deviation from Test Standard**

No deviation.

## 6.6. Test Result


Product	Industrial Power Supply		
Test Item	Voltage Fluctuation and Flicker		
Test Mode	Mode 1: Full Load		
Date of Test	2010/06/10	Test Site	No.3 Shielded Room

Test Result: Pass


Status: Test Completed

Pstj and limit line

European Limits

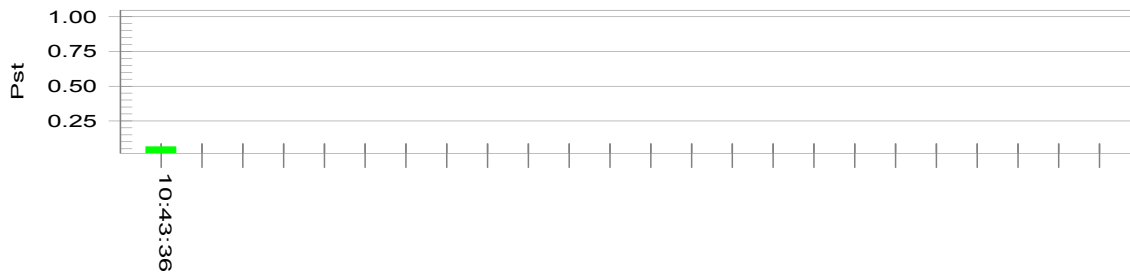

Plt and limit line

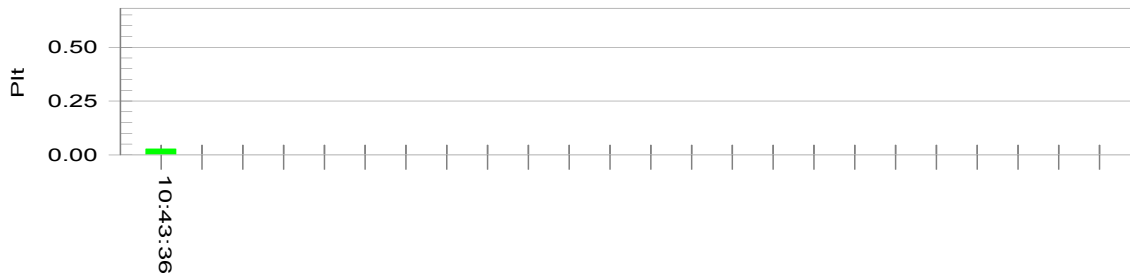

Parameter values recorded during the test:

Vrms at the end of test (Volt):	228.77			
Highest dt (%):	0.00	Test limit (%):	3.30	Pass
Time(mS) > dt:	0.0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650	Pass

## 6.7. Test Photograph

Test Mode : Mode 1: Full Load

Description : Flicker Test Setup




## 7. Electrostatic Discharge

### 7.1. Test Specification

According to Standard : IEC 61000-4-2

### 7.2. Test Setup

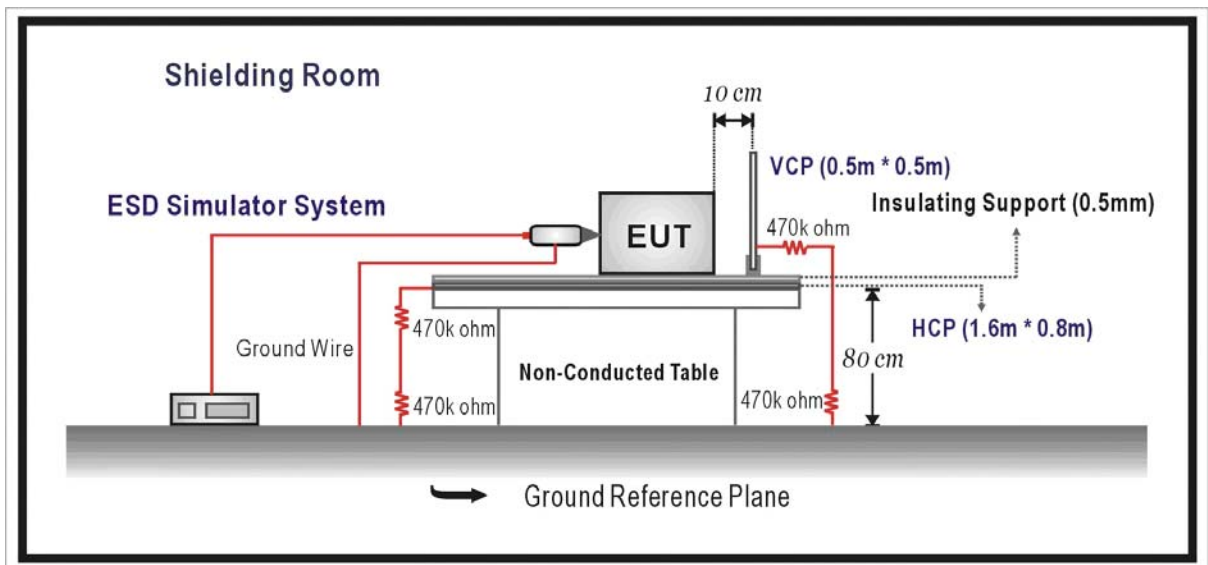

### 7.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Enclosure Port				
	Electrostatic Discharge	kV(Charge Voltage)	±8 Air Discharge ±4 Contact Discharge	B

## 7.4. Test Procedure

Direct application of discharges to the EUT:

Contact discharge was applied only to conductive surfaces of the EUT.

Air discharges were applied only to non-conductive surfaces of the EUT.

During the test, it was performed with single discharges. For the single discharge time between successive single discharges will be keep longer 1 second. It was at least ten single discharges with positive and negative at the same selected point.

The selected point, which was performed with electrostatic discharge, was marked on the red label of the EUT.

Indirect application of discharges to the EUT:

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge. It was at least ten single discharges with positive and negative at the same selected point.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge. It was at least ten single discharges with positive and negative at the same selected point.

## 7.5. Deviation from Test Standard

No deviation.

## 7.6. Test Result

Product	Industrial Power Supply		
Test Item	Electrostatic Discharge		
Test Mode	Mode 1: Full Load		
Date of Test	2010/06/14	Test Site	No.3 Shielded Room

Item	Amount of Discharge	Voltage	Required Criteria	Complied To Criteria (A,B,C)	Results
Air Discharge	10	+8kV	B	A	Pass
	10	-8kV	B	A	Pass
Contact Discharge	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (HCP)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Front)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Left)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Back)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass
Indirect Discharge (VCP Right)	25	+4kV	B	A	Pass
	25	-4kV	B	A	Pass

**Note:**

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

**NR: No Requirement**

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
  - EUT stopped operation and could / could not be reset by operator at \_\_\_\_ kV.
  - No false alarms or other malfunctions were observed during or after the test.


**Remark:**

The Contact discharges were applied at least total 200 discharges at a minimum of four test points.

## 7.7. Test Photograph

Test Mode : Mode 1: Full Load

Description : ESD Test Setup

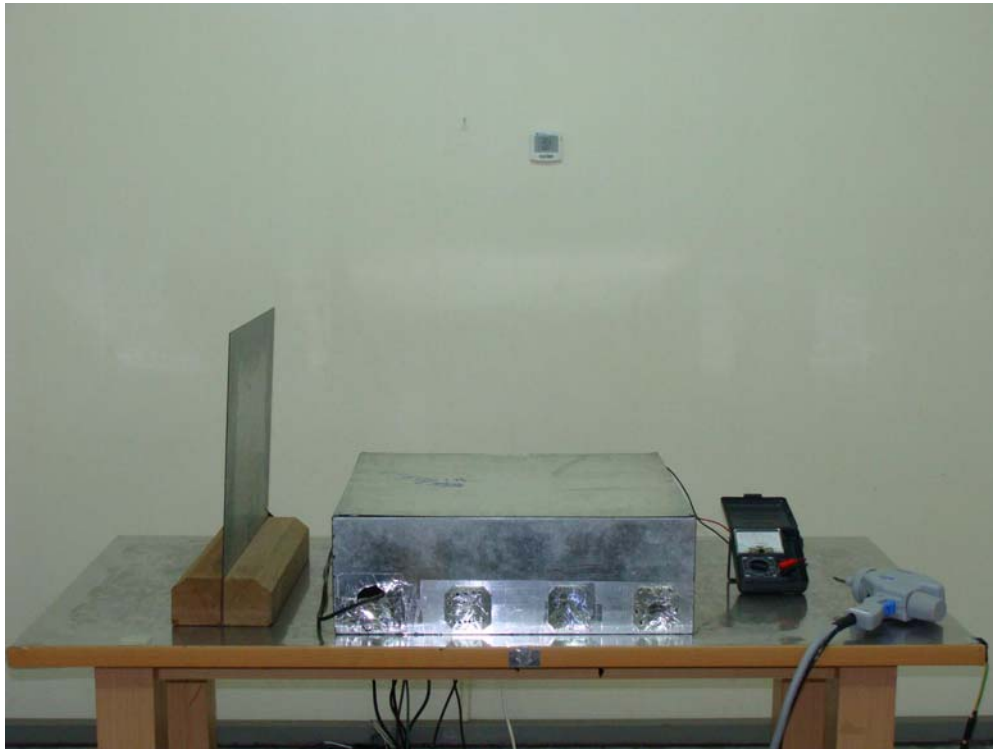


## 8. Radiated Susceptibility

### 8.1. Test Specification

According to Standard : IEC 61000-4-3

### 8.2. Test Setup

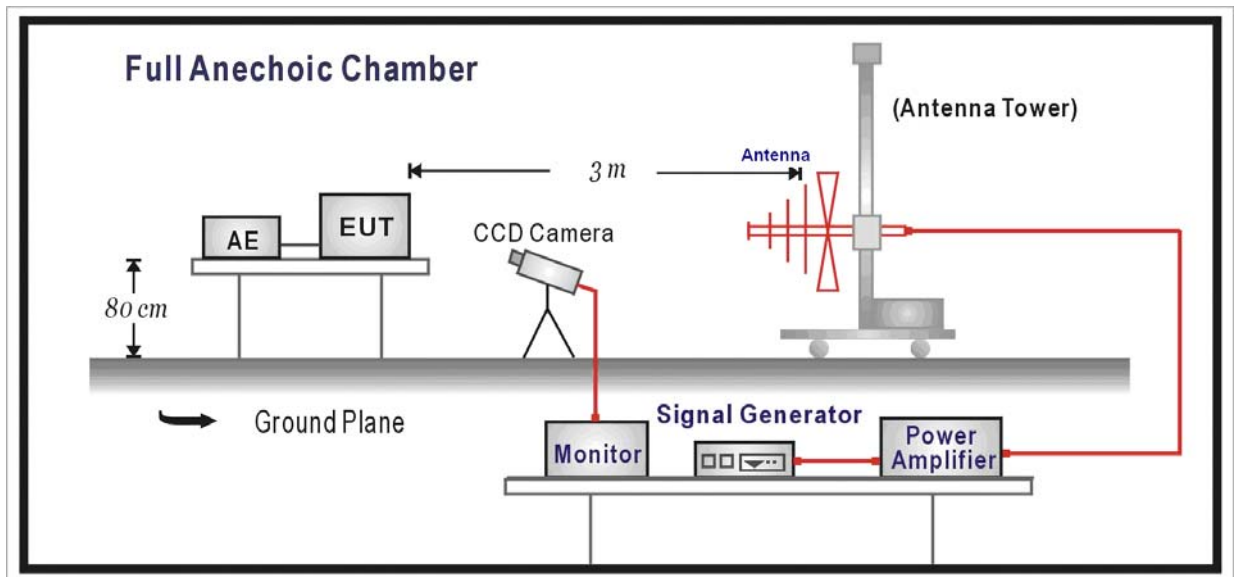

### 8.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Enclosure Port				
	Radio-Frequency	MHz	80-1000	A
	Electromagnetic Field	V/m(Un-modulated, rms)	3	
	Amplitude Modulated	% AM (1kHz)	80	

### 8.4. Test Procedure

The EUT and load, which are placed on a table that is 0.8 meter above ground, are placed with one coincident with the calibration plane such that the distance from antenna to the EUT was 3 meters.

Both horizontal and vertical polarization of the antenna and four sides of the EUT are set on measurement.

In order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

All the scanning conditions are as follows:

Condition of Test	Remarks
1. Field Strength	3 V/m Level 2
2. Radiated Signal	AM 80% Modulated with 1kHz
3. Scanning Frequency	80MHz - 1000MHz
4. Dwell Time	3 Seconds
5. Frequency step size $\Delta f$ :	1%
6. The rate of Swept of Frequency	$1.5 \times 10^{-3}$ decades/s

### 8.5. Deviation from Test Standard

No deviation.

**8.6. Test Result**

Product	Industrial Power Supply		
Test Item	Radiated susceptibility		
Test Mode	Mode 1: Full Load		
Date of Test	2010/06/10	Test Site	Chamber5

Frequency (MHz)	Position (Angle)	Polarity (H or V)	Field Strength (V/m)	Required Criteria	Complied To Criteria (A,B,C)	Results
80-1000	FRONT	H	3	A	A	PASS
80-1000	FRONT	V	3	A	A	PASS
80-1000	BACK	H	3	A	A	PASS
80-1000	BACK	V	3	A	A	PASS
80-1000	RIGHT	H	3	A	A	PASS
80-1000	RIGHT	V	3	A	A	PASS
80-1000	LEFT	H	3	A	A	PASS
80-1000	LEFT	V	3	A	A	PASS
80-1000	UP	H	3	A	A	PASS
80-1000	UP	V	3	A	A	PASS
80-1000	DOWN	H	3	A	A	PASS
80-1000	DOWN	V	3	A	A	PASS

**Note:**


The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
  - There was no observable degradation in performance.
  - EUT stopped operation and could / could not be reset by operator at \_\_\_\_\_ V/m at frequency \_\_\_\_\_ MHz.
- No false alarms or other malfunctions were observed during or after the test.

**8.7. Test Photograph**

Test Mode : Mode 1: Full Load

Description : Radiated Susceptibility Test Setup

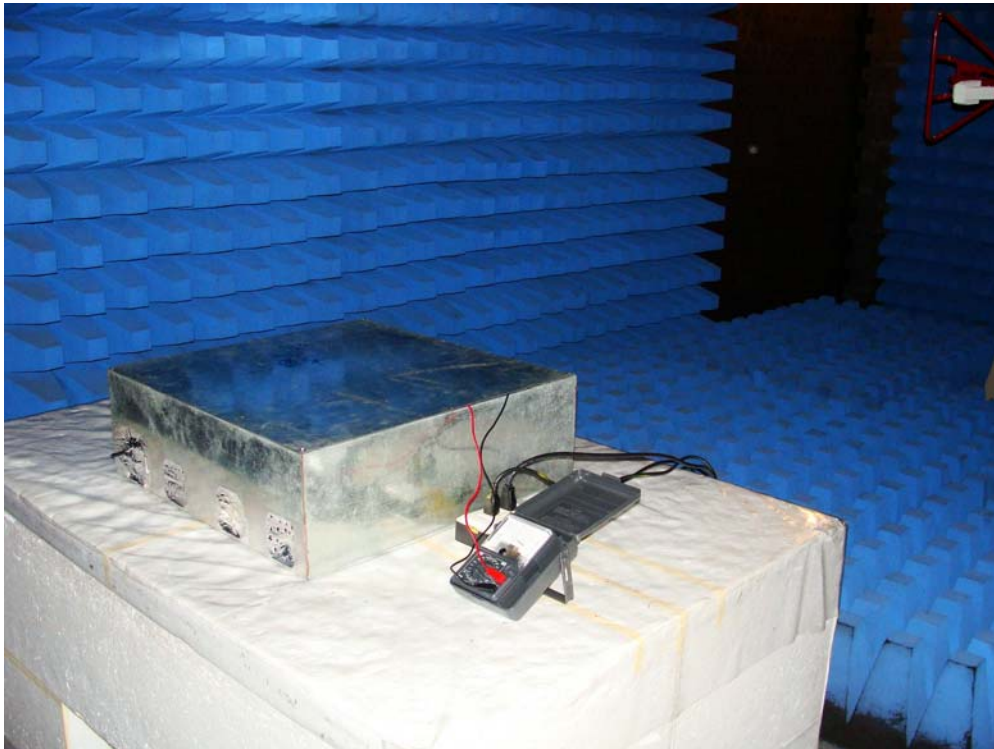


9. Electrical Fast Transient/Burst

9.1. Test Specification

According to Standard : IEC 61000-4-4

9.2. Test Setup

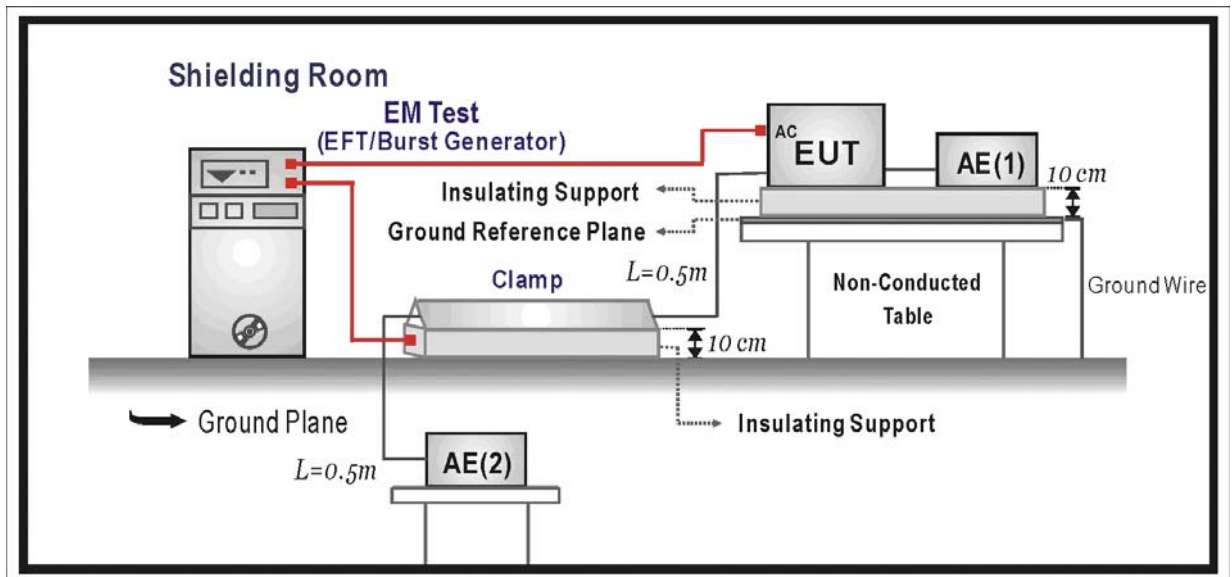

9.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
I/O and communication ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	+0.5 5/50 5	B
Input DC Power Ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	+0.5 5/50 5	B
Input AC Power Ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	+1 5/50 5	B

#### **9.4. Test Procedure**

The EUT is placed on a table that is 0.8 meter height. A ground reference plane is placed on the table, and uses a 0.1m insulation between the EUT and ground reference plane.

The minimum area of the ground reference plane is 1m\*1m, and 0.65mm thick min, and projected beyond the EUT by at least 0.1m on all sides.

Test on I/O and communication ports:

The EFT interference signal is through a coupling clamp device couples to the signal and control lines of the EUT with burst noise for 1 minute.

Test on power supply ports:

The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal.

Each of the Line and Neutral conductors is impressed with burst noise for 1 minute.

The length of the signal and power lines between the coupling device and the EUT is 0.5m.

#### **9.5. Deviation from Test Standard**

No deviation.

**9.6. Test Result**

Product	Industrial Power Supply		
Test Item	Electrical fast transient/burst		
Test Mode	Mode 1: Full Load		
Date of Test	2010/06/10	Test Site	No.2 Shielded Room

Inject Line	Polarity	Voltage kV	Inject Time (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L+N+PE	±	1kV	60	Direct	B	A	PASS

**Note:**

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
  - EUT stopped operation and could / could not be reset by operator at \_\_\_\_\_ kV of Line \_\_\_\_\_.
- No false alarms or other malfunctions were observed during or after the test.

## 9.7. Test Photograph

Test Mode : Mode 1: Full Load

Description : EFT/B Test Setup




10. Surge

10.1. Test Specification

According to Standard : IEC 61000-4-5

10.2. Test Setup

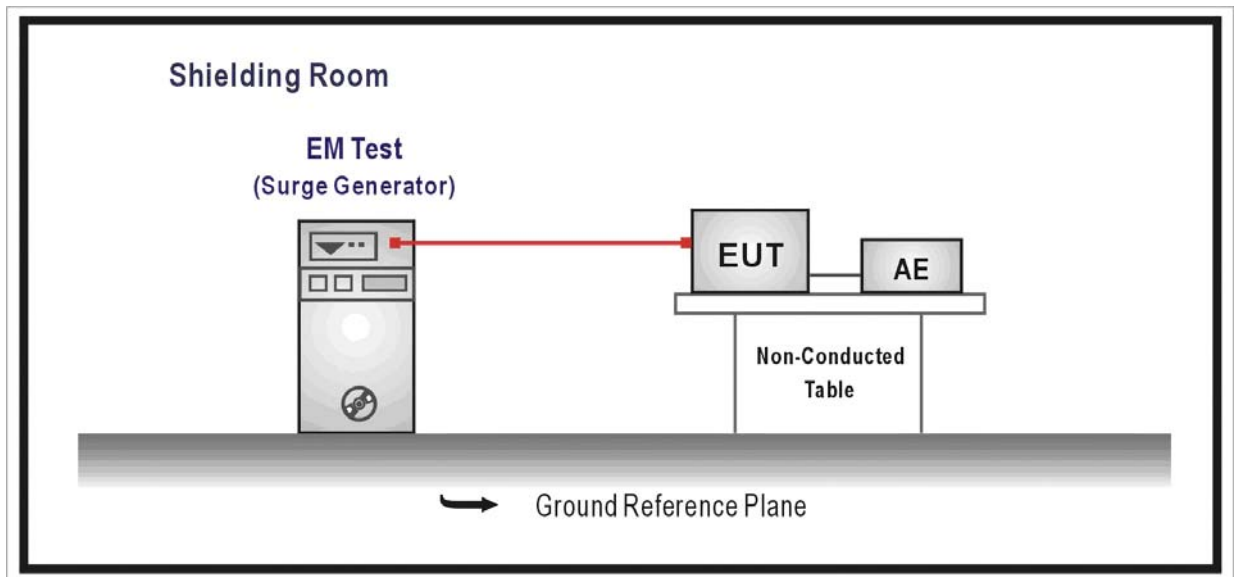

10.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Signal Ports and Telecommunication Ports(See 1) and 2) )				
	Surges Line to Ground	Tr/Th us kV	1.2/50 (8/20) ± 1	B
Input DC Power Ports				
	Surges Line to Ground	Tr/Th us kV	1.2/50 (8/20) ± 0.5	B
AC Input and AC Output Power Ports				
	Surges Line to Line Line to Ground	Tr/Th us kV kV	1.2/50 (8/20) ± 1 ± 2	B

Notes:

- 1) Applicable only to ports which according to the manufacturer’s may directly to outdoor cables.
- 2) Where normal functioning cannot be achieved because of the impact of the CDN on the EUT, no immunity test shall be required.

#### **10.4. Test Procedure**

The EUT and its load are placed on a table that is 0.8 meter above a metal ground plane measured 1m\*1m min. and 0.65mm thick min. And projected beyond the EUT by at least 0.1m on all sides. The length of power cord between the coupling device and the EUT shall be 2m or less.

For Input and Output AC Power or DC Input and DC Output Power Ports:

The EUT is connected to the power mains through a coupling device that directly couples the Surge interference signal.

The surge noise shall be applied synchronized to the voltage phase at 0<sup>0</sup>, 90<sup>0</sup>, 180<sup>0</sup>, 270<sup>0</sup> and the peak value of the a.c. voltage wave. (Positive and negative)

Each of Line-Earth and Line-Line is impressed with a sequence of five surge voltages with interval of 1 min.

#### **10.5. Deviation from Test Standard**

No deviation.

## 10.6. Test Result

Product	Industrial Power Supply		
Test Item	Surge		
Test Mode	Mode 1: Full Load		
Date of Test	2010/06/10	Test Site	No.2 Shielded Room

Inject Line	Polarity	Angle	Voltage kV	Time Interval (Second)	Inject Method	Required Criteria	Complied to Criteria	Result
L-N	±	0	1kV	60	Direct	B	A	PASS
L-N	±	90	1kV	60	Direct	B	A	PASS
L-N	±	180	1kV	60	Direct	B	A	PASS
L-N	±	270	1kV	60	Direct	B	A	PASS
N-PE	±	0	2kV	60	Direct	B	A	PASS
N-PE	±	90	2kV	60	Direct	B	A	PASS
N-PE	±	180	2kV	60	Direct	B	A	PASS
N-PE	±	270	2kV	60	Direct	B	A	PASS
L-PE	±	0	2kV	60	Direct	B	A	PASS
L-PE	±	90	2kV	60	Direct	B	A	PASS
L-PE	±	180	2kV	60	Direct	B	A	PASS
L-PE	±	270	2kV	60	Direct	B	A	PASS

**Note:**

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
  - EUT stopped operation and could / could not be reset by operator at \_\_\_\_\_ kV of Line \_\_\_\_\_.
- No false alarms or other malfunctions were observed during or after the test.

## 10.7. Test Photograph

Test Mode : Mode 1: Full Load

Description : SURGE Test Setup




## 11. Conducted Susceptibility

### 11.1. Test Specification


According to Standard : IEC 61000-4-6

### 11.2. Test Setup

#### CDN Test Mode

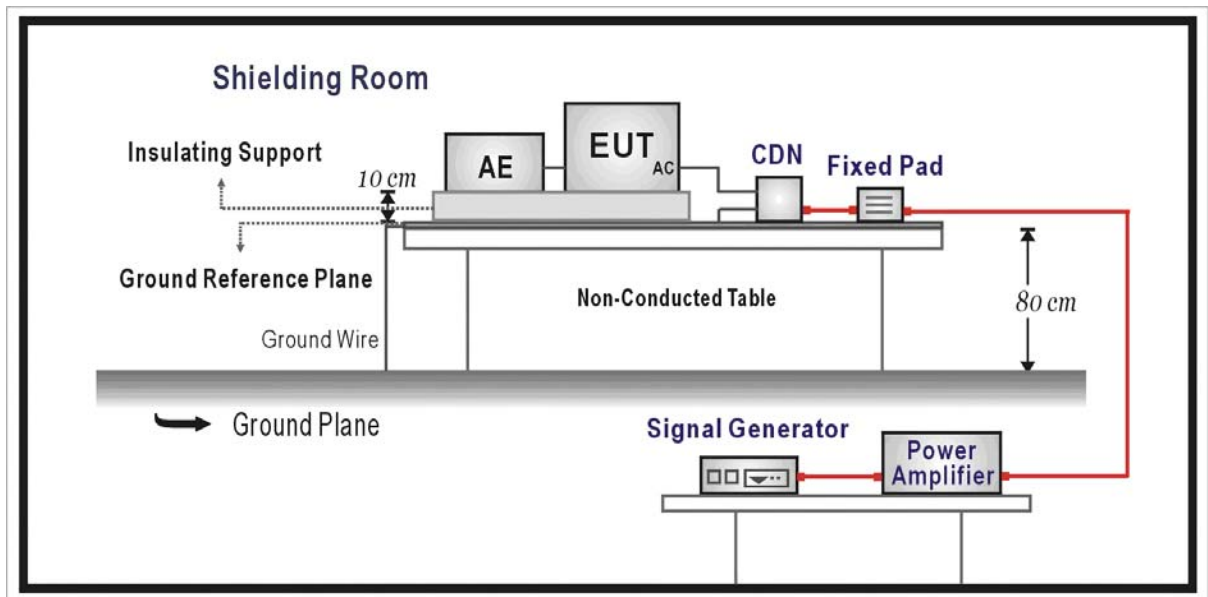

#### EM Clamp Test Mode

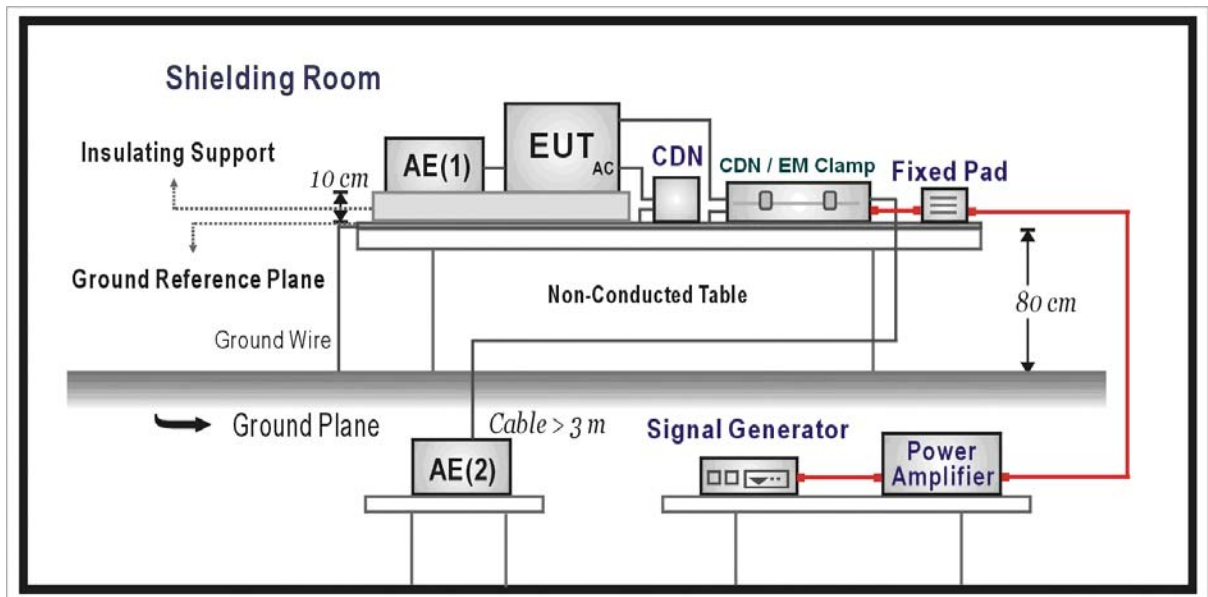

**11.3. Limit**

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
<b>Signal Ports and Telecommunication Ports</b>				
	Radio-Frequency Continuous Conducted	MHz V (rms, Un-modulated) % AM (1kHz)	0.15-80 3 80	A
<b>Input DC Power Ports</b>				
	Radio-Frequency Continuous Conducted	MHz V (rms, Un-modulated) % AM (1kHz)	0.15-80 3 80	A
<b>Input AC Power Ports</b>				
	Radio-Frequency Continuous Conducted	MHz V (rms, Un-modulated) % AM (1kHz)	0.15-80 3 80	A

**11.4. Test Procedure**

The EUT are placed on a table that is 0.8 meter height, and a Ground reference plane on the table, EUT are placed upon table and use a 10cm insulation between the EUT and Ground reference plane.

For Signal Ports and Telecommunication Ports

The disturbance signal is through a coupling and decoupling networks (CDN) or EM-clamp device couples to the signal and Telecommunication lines of the EUT.

For Input DC and AC Power Ports

The EUT is connected to the power mains through a coupling and decoupling networks for power supply lines. And directly couples the disturbances signal into EUT.

Used CDN-M2 for two wires or CDN-M3 for three wires.

All the scanning conditions are as follows:

Condition of Test	Remarks
1. Field Strength	130dBuV(3V) Level 2
2. Radiated Signal	AM 80% Modulated with 1kHz
3. Scanning Frequency	0.15MHz – 80MHz
4. Dwell Time	3 Seconds
5. Frequency step size $\Delta f$ :	1%
6. The rate of Swept of Frequency	$1.5 \times 10^{-3}$ decades/s

**11.5. Deviation from Test Standard**

No deviation.

**11.6. Test Result**

Product	Industrial Power Supply		
Test Item	Conducted susceptibility		
Test Mode	Mode 1: Full Load		
Date of Test	2010/06/10	Test Site	No.6 Shielded Room

Frequency Range (MHz)	Voltage Applied dBuV(V)	Inject Method	Tested Port of EUT	Required Criteria	Performance Criteria Complied To	Result
0.15~80	130 (3V)	CDN	AC IN	A	A	PASS

**Note:**

The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

- Meet criteria A : Operate as intended during and after the test
- Meet criteria B : Operate as intended after the test
- Meet criteria C : Loss/Error of function
- Additional Information
  - EUT stopped operation and could / could not be reset by operator at \_\_\_\_\_ dBuV(V) at frequency \_\_\_\_\_MHz.
  - No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

## 11.7. Test Photograph

Test Mode : Mode 1: Full Load

Description : Conducted Susceptibility Test Setup




**12. Power Frequency Magnetic Field**

**12.1. Test Specification**

According to Standard : IEC 61000-4-8

**12.2. Test Setup**

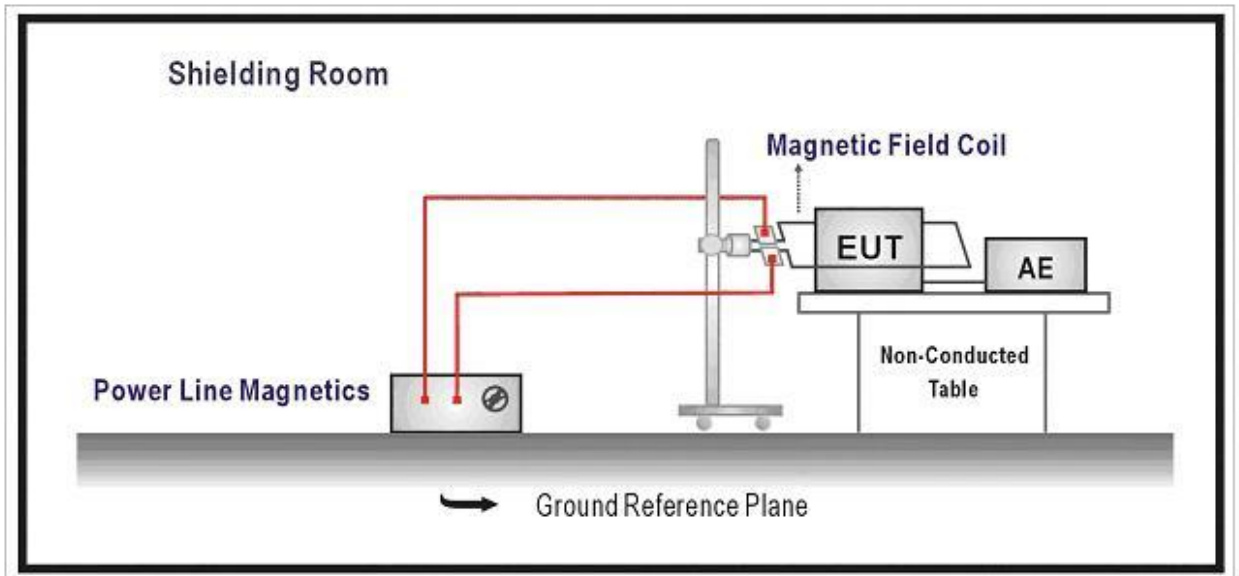

**12.3. Limit**

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Enclosure Port				
	Power-Frequency Magnetic Field	Hz A/m (r.m.s.)	50 1	A

**12.4. Test Procedure**

The EUT and its load are placed on a table which is 0.8 meter above a metal ground plane measured at least 1m\*1m min. The test magnetic field shall be placed at central of the induction coil.

The test magnetic Field shall be applied 10 minutes by the immersion method to the EUT. And the induction coil shall be rotated by 90° in order to expose the EUT to the test field with different orientation (X, Y, Z Orientations).

**12.5. Deviation from Test Standard**

No deviation.

**12.6. Test Result**

Product	Industrial Power Supply		
Test Item	Power frequency magnetic field		
Test Mode	Mode 1: Full Load		
Date of Test	2010/06/10	Test Site	No.3 Shielded Room

Polarization	Frequency (Hz)	Magnetic Strength (A/m)	Required Performance Criteria	Performance Criteria Complied To	Test Result
X Orientation	50	1	A	A	PASS
Y Orientation	50	1	A	A	PASS
Z Orientation	50	1	A	A	PASS

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
  - EUT stopped operation and could / could not be reset by operator at \_\_\_\_\_ kV of Line \_\_\_\_\_.
- No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

## 12.7. Test Photograph

Test Mode : Mode 1: Full Load

Description : Power Frequency Magnetic Field Test Setup




### 13. Voltage Dips and Interruption

#### 13.1. Test Specification

According to Standard : IEC 61000-4-11

#### 13.2. Test Setup

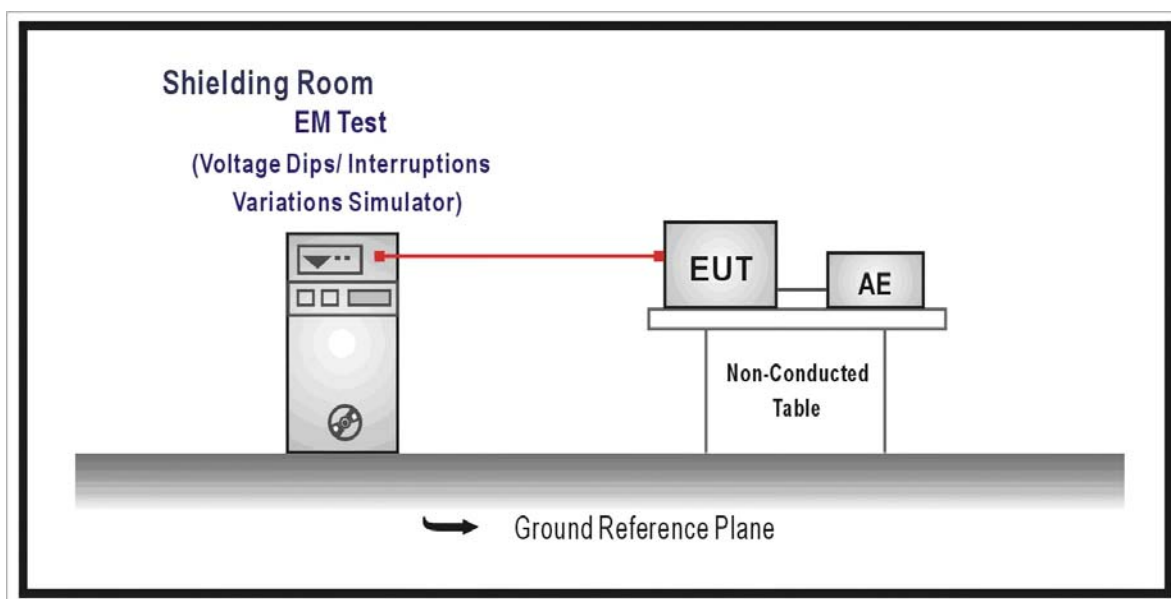

#### 13.3. Limit

Item	Environmental Phenomena	Units	Test Specification	Performance Criteria
Input AC Power Ports				
Voltage Dips	% Reduction	30	C	
	Period	25		
Voltage Interruptions	% Reduction	>95	B	
	Period	0.5		
Voltage Interruptions	% Reduction	> 95	C	
	Period	250		

### 13.4. Test Procedure

The EUT and its load are placed on a table which is 0.8 meter above a metal ground plane measured 1m\*1m min. And 0.65mm thick min. And projected beyond the EUT by at least 0.1m on all sides. The power cord shall be used the shortest power cord as specified by the manufacturer.

For Voltage Dips/ Interruptions test:

The selection of test voltage is based on the rated power range. If the operation range is large than 20% of lower power range, both end of specified voltage shall be tested.

Otherwise, the typical voltage specification is selected as test voltage.

The EUT is connected to the power mains through a coupling device that directly couples to the Voltage Dips and Interruption Generator.

The EUT shall be tested for 30% voltage dip of supplied voltage and duration 25 Periods, for 95% voltage dip of supplied voltage and duration 0.5 Periods with a sequence of three voltage dips with intervals of 10 seconds, and for 95% voltage interruption of supplied voltage and duration 250 Periods with a sequence of three voltage interruptions with intervals of 10 seconds.

Voltage phase shifting are shall occur at  $0^{\circ}$ ,  $45^{\circ}$ ,  $90^{\circ}$ ,  $135^{\circ}$ ,  $180^{\circ}$ ,  $225^{\circ}$ ,  $270^{\circ}$ ,  $315^{\circ}$  of the voltage.

### 13.5. Deviation from Test Standard

No deviation.

13.6. Test Result

Product	Industrial Power Supply		
Test Item	Voltage dips and interruption		
Test Mode	Mode 1: Full Load		
Date of Test	2010/06/10	Test Site	No.2 Shielded Room

Voltage Dips and Interruption Reduction(%)	Angle	Test Duration (Periods)	Required Performance Criteria	Performance Criteria Complied To	Test Result
30	0	25	C	A	PASS
30	45	25	C	A	PASS
30	90	25	C	A	PASS
30	135	25	C	A	PASS
30	180	25	C	A	PASS
30	225	25	C	A	PASS
30	270	25	C	A	PASS
30	315	25	C	A	PASS
>95	0	0.5	B	A	PASS
>95	45	0.5	B	A	PASS
>95	90	0.5	B	A	PASS
>95	135	0.5	B	A	PASS
>95	180	0.5	B	A	PASS
>95	225	0.5	B	A	PASS
>95	270	0.5	B	A	PASS
>95	315	0.5	B	A	PASS
>95	0	250	C	B	PASS
>95	45	250	C	B	PASS
>95	90	250	C	B	PASS
>95	135	250	C	B	PASS
>95	180	250	C	B	PASS
>95	225	250	C	B	PASS
>95	270	250	C	B	PASS
>95	315	250	C	B	PASS

- Meet criteria A: Operate as intended during and after the test
- Meet criteria B: Operate as intended after the test
- Meet criteria C: Loss/Error of function
- Additional Information
  - The nominal voltage of EUT is 230V.
  - EUT stopped operation and could / could not be reset by operator at \_\_\_\_\_ kV of Line \_\_\_\_\_.
- No false alarms or other malfunctions were observed during or after the test. The acceptance criteria were met, and the EUT passed the test.

## 13.7. Test Photograph

Test Mode : Mode 1: Full Load

Description : Voltage Dips Test Setup



14. Attachment

➤ EUT Photograph

(1) EUT Photo



(2) EUT Photo



15.

16.

(3) EUT Photo



(4) EUT Photo



17.

18.

(5) EUT Photo



(6) EUT Photo



19.

20.

(7) EUT Photo

